


K-T-STECK VERS DRE AG-K

Male branch tees, swivel type, parallel male thread

属性

| | |
|------|------------------|
| 工作压力 | Max. 16 bar |
| 工作温度 | -20 °C to +80 °C |
| 原料 | 黄铜镀镍 |
| 紧压环 | Hostaform |
| 张紧环 | Stainless steel |

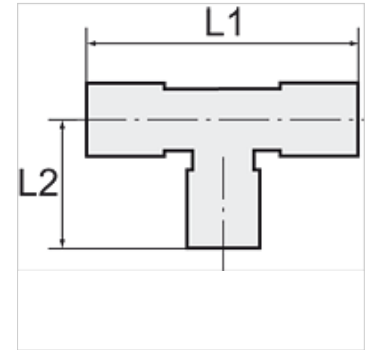

提示

其它数据应客户要求提供。

描述

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

货品

| 名称 | 螺纹 | 用于软管外径-Ø | L1 (mm) | L2 (mm) | SW |
|----------------|-------|----------|------------|------------|-------|
| K- 07 40 27 18 | R 1/8 | 4 mm | 37,2 | 19,8 | 12 mm |
| K- 07 40 27 19 | R 1/8 | 6 mm | 43,8 | 19,8 | 12 mm |
| K- 07 40 27 20 | R 1/8 | 8 mm | 50,8 | 19,8 | 12 mm |
| K- 07 40 27 15 | R 1/4 | 4 mm | 37,2 | 22,6 | 14 mm |
| K- 07 40 27 16 | R 1/4 | 6 mm | 43,8 | 22,6 | 14 mm |
| K- 07 40 27 17 | R 1/4 | 8 mm | 50,8 | 23,6 | 14 mm |
| K- 07 40 27 14 | R 1/4 | 10 mm | 54,4 | 26,3 | 14 mm |
| K- 07 40 27 22 | R 3/8 | 8 mm | 47,2 | 27,1 | 17 mm |
| K- 07 40 27 21 | R 3/8 | 10 mm | 54,4 | 27,1 | 17 mm |