



# K-STECKVERSCHR AGR OR SK

Male connectors, parallel male thread with O-ring and outer hex

**HANSA FLEX**

## 属性

工作压力	Max. 15 bar, coarse vacuum
应用范围	Air, vacuum
推荐的软管	PU or PA (nylon)
适用介质	Compressed air and all gases or liquids that are compatible with the materials
温度范围	-20 °C to +80 °C
密封面	Parallel version: O-ring in housing
原料	Plastic, Nickel plated brass
紧压环	Plastic

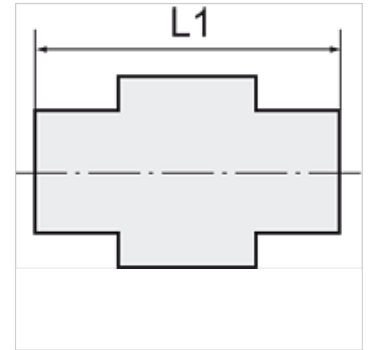

## 提示

其它数据应客户要求提供。

## 描述

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## 货品

名称	螺纹	用于软管外径-Ø	内六角 (mm)	L1 (mm)	SW
K- 07 40 00 78	M 5	4 mm	2,0	20,8	10 mm
K- 07 40 00 79	M 5	6 mm	2,0	22,2	12 mm
K- 07 40 00 92	G 1/8	4 mm	3,0	19,3	10 mm
K- 07 40 00 93	G 1/8	6 mm	4,0	20,2	12 mm
K- 07 40 00 94	G 1/8	8 mm	5,0	27,1	14 mm
K- 07 40 00 90	G 1/8	10 mm	5,0	28,9	17 mm
K- 07 40 00 91	G 1/8	12 mm	5,0	31,6	21 mm
K- 07 40 00 87	G 1/4	4 mm	3,0	17,4	10 mm
K- 07 40 00 88	G 1/4	6 mm	4,0	20,9	12 mm
K- 07 40 00 89	G 1/4	8 mm	6,0	23,0	14 mm
K- 07 40 00 85	G 1/4	10 mm	6,0	29,9	17 mm
K- 07 40 00 86	G 1/4	12 mm	6,0	32,6	21 mm
K- 07 40 00 98	G 3/8	6 mm	4,0	19,5	12 mm
K- 07 40 00 99	G 3/8	8 mm	6,0	22,1	14 mm
K- 07 40 00 95	G 3/8	10 mm	8,0	25,9	17 mm
K- 07 40 00 96	G 3/8	12 mm	8,0	28,6	21 mm
K- 07 40 00 97	G 3/8	16 mm	8,0	36,1	24 mm
K- 07 40 00 83	G 1/2	6 mm	4,0	22,6	12 mm
K- 07 40 00 84	G 1/2	8 mm	6,0	23,2	14 mm
K- 07 40 00 80	G 1/2	10 mm	8,0	24,5	17 mm
K- 07 40 00 81	G 1/2	12 mm	8,0	31,1	21 mm
K- 07 40 00 82	G 1/2	16 mm	10,0	38,1	24 mm