
K-STECKVERSCHR AGR-K SK BESCH

Male connectors, conical male thread, coated with outer hex

属性

工作压力	Max. 16 bar
工作温度	-20 °C to +150 °C
原料	黄铜镀镍
紧压环	Nickel-plated brass
张紧环	Stainless steel



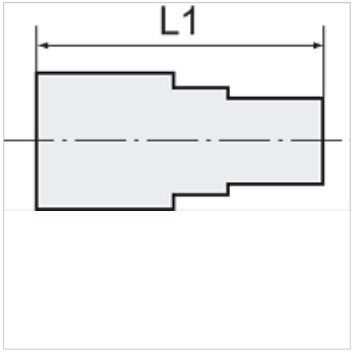

提示

其它数据应客户要求提供。

描述

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

货品

名称	螺纹	用于软管外径-Ø	L1 (mm)	SW
K- 07 40 27 26	R 1/8	4 mm	22,5	10 mm
K- 07 40 27 27	R 1/8	6 mm	24,5	11 mm
K- 07 40 27 28	R 1/8	8 mm	27,5	13 mm
K- 07 40 47 62	R 1/4	4 mm	22,5	14 mm
K- 07 40 27 24	R 1/4	6 mm	24,5	14 mm
K- 07 40 27 25	R 1/4	8 mm	27,5	13 mm
K- 07 40 27 23	R 1/4	10 mm	32,5	16 mm
K- 07 40 47 61	R 1/4	12 mm	32,5	17 mm
K- 07 40 27 30	R 3/8	8 mm	28,0	17 mm
K- 07 40 27 29	R 3/8	10 mm	32,5	17 mm
K- 07 40 47 63	R 3/8	12 mm	30,5	17 mm
K- 07 40 47 60	R 1/2	12 mm	33,0	22 mm

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。