


# K-L-STECKVER DREH AG-K BESCH

Male elbows, swivel type, conical male thread, coated

**HANSA FLEX**

## 属性

工作压力	Max. 15 bar, coarse vacuum
应用范围	Air, vacuum
推荐的软管	PU or PA (nylon)
适用介质	Compressed air and all gases or liquids that are compatible with the materials
温度范围	-20 °C to +80 °C
密封面	Conical version: thread coating
原料	Plastic, Nickel plated brass
紧压环	Plastic

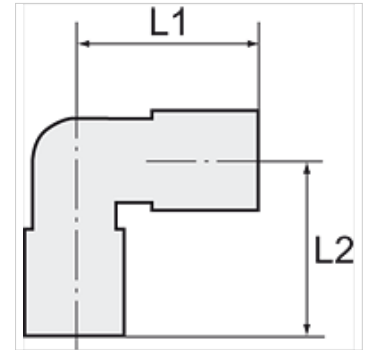

## 提示

其它数据应客户要求提供。

## 描述

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## 货品

名称	螺纹	用于软管外径-Ø	L1 (mm)	L2 (mm)	SW
K- 07 40 01 68	R 1/8	4 mm	18,8	18,5	10 mm
K- 07 40 01 69	R 1/8	6 mm	20,0	19,5	10 mm
K- 07 40 01 70	R 1/8	8 mm	22,5	22,9	10 mm
K- 07 40 01 65	R 1/4	4 mm	18,8	20,0	14 mm
K- 07 40 01 66	R 1/4	6 mm	20,0	21,0	14 mm
K- 07 40 01 67	R 1/4	8 mm	22,5	21,5	14 mm
K- 07 40 01 63	R 1/4	10 mm	26,9	26,3	17 mm
K- 07 40 01 64	R 1/4	12 mm	28,5	27,8	17 mm
K- 07 40 01 74	R 3/8	6 mm	20,0	22,5	17 mm
K- 07 40 01 75	R 3/8	8 mm	22,5	23,0	17 mm
K- 07 40 01 71	R 3/8	10 mm	26,9	24,8	17 mm
K- 07 40 01 72	R 3/8	12 mm	28,5	26,3	17 mm
K- 07 40 01 73	R 3/8	16 mm	33,5	33,7	20 mm
K- 07 40 01 61	R 1/2	6 mm	20,0	25,5	21 mm
K- 07 40 01 62	R 1/2	8 mm	22,5	26,0	21 mm
K- 07 40 01 58	R 1/2	10 mm	26,9	27,8	21 mm
K- 07 40 01 59	R 1/2	12 mm	28,5	29,3	21 mm
K- 07 40 01 60	R 1/2	16 mm	33,5	36,7	21 mm