


# K-STECKVERBINDU 10BAR

Straight push-in connector (pressure max. 10 bar)

**HANSA FLEX**

## 属性

工作压力	Max. 10 bar
应用范围	Air, vacuum
推荐的软管	PU or PA (nylon)
适用介质	Compressed air and all gases or liquids that are compatible with the materials
温度范围	-20 °C to +80 °C
原料	Plastic, Nickel plated brass
紧压环	Plastic

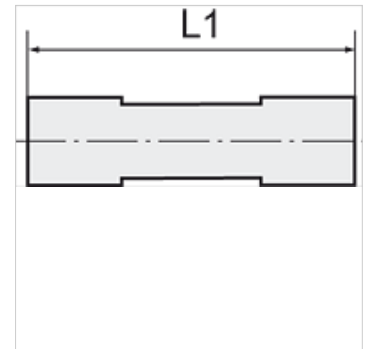

## 提示

其它数据应客户要求提供。

## 描述

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## 货品

名称	用于软管外径-Ø	L1 (mm)
K- 07 40 03 39	4 mm	33,0
K- 07 40 03 40	6 mm	34,6
K- 07 40 03 41	8 mm	38,5
K- 07 40 03 42	10 mm	47,0
K- 07 40 03 43	12 mm	48,6
K- 07 40 41 32	14 mm	48,7
K- 07 40 03 44	16 mm	49,8