


K-T-STECK VB

Union tees

HANSA FLEX

属性

| | |
|-------|--|
| 工作压力 | Max. 15 bar, coarse vacuum |
| 应用范围 | Air, vacuum |
| 推荐的软管 | PU or PA (nylon) |
| 适用介质 | Compressed air and all gases or liquids that are compatible with the materials |
| 温度范围 | -20 °C to +80 °C |
| 原料 | Plastic, Nickel plated brass |
| 紧压环 | Plastic |

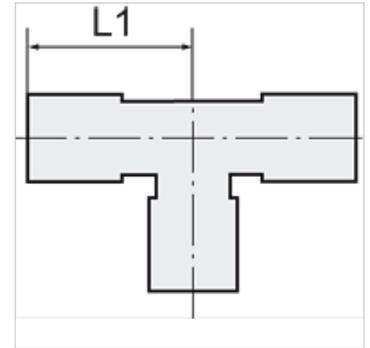

提示

其它数据应客户要求提供。

描述

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

货品

| 名称 | 用于软管外径-Ø | L1 (mm) |
|----------------|----------|------------|
| K- 07 40 03 56 | 4 mm | 18,5 |
| K- 07 40 03 57 | 6 mm | 19,0 |
| K- 07 40 03 58 | 8 mm | 22,5 |
| K- 07 40 03 59 | 10 mm | 27,9 |
| K- 07 40 03 60 | 12 mm | 29,3 |
| K- 07 40 41 40 | 14 mm | 31,0 |
| K- 07 40 03 61 | 16 mm | 32,5 |