


# K-X-STECKVERBINDUNG

X-unions

**HANSA FLEX**

## 属性

工作压力	Max. 15 bar, coarse vacuum
应用范围	Air, vacuum
推荐的软管	PU or PA (nylon)
适用介质	Compressed air and all gases or liquids that are compatible with the materials
温度范围	-20 °C to +80 °C
原料	Plastic, Nickel plated brass
紧压环	Plastic

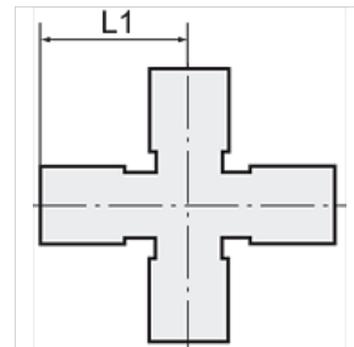

## 提示

其它数据应客户要求提供。

## 描述

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## 货品

名称	用于软管外径-Ø	L1 (mm)
K- 07 40 03 70	4 mm	17,5
K- 07 40 03 71	6 mm	19,0
K- 07 40 03 72	8 mm	22,8
K- 07 40 03 73	10 mm	27,9
K- 07 40 03 74	12 mm	29,3