


# K-L-SCHOTT STECK

Bulkhead connectors, elbow type

**HANSA FLEX**

## 属性

工作压力	Max. 15 bar, coarse vacuum
应用范围	Air, vacuum
推荐的软管	PU or PA (nylon)
适用介质	Compressed air and all gases or liquids that are compatible with the materials
温度范围	-20 °C to +80 °C
原料	Plastic, Nickel plated brass
紧压环	Plastic

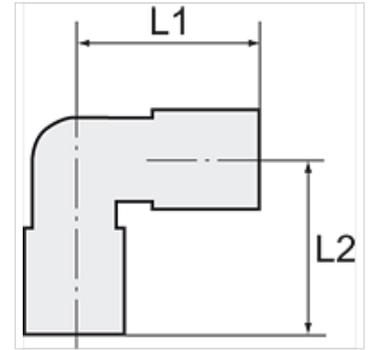

## 提示

其它数据应客户要求提供。

## 描述

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## 货品

名称	用于软管外径-Ø	配电板螺纹	L1 (mm)	L2 (mm)	SW
K- 07 40 04 47	4 mm	M 12 x 1	17,5	31,3	14 mm
K- 07 40 04 48	6 mm	M 14 x 1	18,7	37,9	17 mm
K- 07 40 04 49	8 mm	M 16 x 1	22,5	43,6	19 mm
K- 07 40 04 50	10 mm	M 20 x 1	27,2	51,2	24 mm
K- 07 40 04 51	12 mm	M 22 x 1	29,3	56,1	27 mm
K- 07 40 04 52	16 mm	M 27 x 1	32,5	62,6	30 mm