


# K-L-MEHRFACHVERT 3 DR AGR-K

Multiple union elbows with inner hex, 3 outlets, swivel type, conical male thread, coated

**HANSA FLEX**

## 属性

工作压力	Max. 15 bar, coarse vacuum
应用范围	Air, vacuum
推荐的软管	PU or PA (nylon)
适用介质	Compressed air and all gases or liquids that are compatible with the materials
温度范围	-20 °C to +80 °C
密封面	Conical version: thread coating
原料	Plastic, Nickel plated brass
紧压环	Plastic

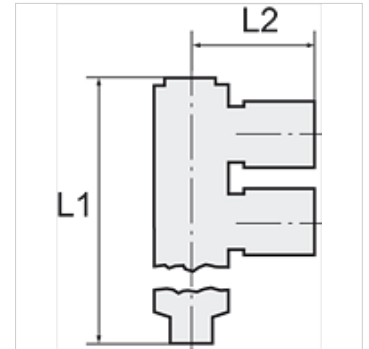

## 提示

其它数据应客户要求提供。

## 描述

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## 货品

名称	螺纹	用于软管外径-Ø	内六角 (mm)	L1 (mm)	L2 (mm)	SW
K- 07 40 05 31	R 1/8	4 mm	4,0	59,6	22,5	14 mm
K- 07 40 05 32	R 1/8	6 mm	4,0	59,6	21,5	14 mm
K- 07 40 05 33	R 1/8	8 mm	4,0	59,6	24,5	14 mm
K- 07 40 05 29	R 1/4	6 mm	6,0	81,0	23,5	17 mm
K- 07 40 05 30	R 1/4	8 mm	6,0	81,0	26,5	17 mm
K- 07 40 05 27	R 1/4	10 mm	6,0	81,0	29,9	17 mm
K- 07 40 05 28	R 1/4	12 mm	6,0	81,0	30,8	17 mm
K- 07 40 05 36	R 3/8	8 mm	8,0	83,7	28,5	20 mm
K- 07 40 05 34	R 3/8	10 mm	8,0	83,7	31,9	20 mm
K- 07 40 05 35	R 3/8	12 mm	8,0	83,7	32,8	20 mm