


属性

工作压力	Max. 15 bar, coarse vacuum
应用范围	Air, vacuum
推荐的软管	PU or PA (nylon)
适用介质	Compressed air and all gases or liquids that are compatible with the materials
温度范围	-20 °C to +80 °C
密封面	Parallel version: O-ring in housing, Conical version: thread coating
原料	Plastic, Nickel plated brass
紧压环	Plastic

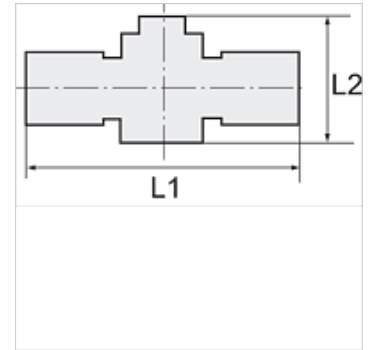

提示

其它数据应客户要求提供。

描述

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

货品

名称	螺纹 1	螺纹 2	L1 (mm)	L2 (mm)	SW
K- 07 40 07 81	R 1/8	R 1/8	65,0	42,6	12 mm
K- 07 40 07 80	R 1/4	R 1/8	67,5	42,6	14 mm / 12 mm
K- 07 40 07 79	R 1/4	R 1/4	70,0	42,6	14 mm
K- 07 40 07 82	R 3/8	R 1/4	82,0	47,0	17 mm / 14 mm
K- 07 40 07 83	R 3/8	R 3/8	83,5	47,0	17 mm
K- 07 40 07 78	R 1/2	R 3/8	87,0	47,0	21 mm / 17 mm
K- 07 40 07 77	R 1/2	R 1/2	90,5	47,0	21 mm