# K-STECKVERSCH AGR OR SK M O 1

Male connectors, parallel male thread with O-ring and outer hex

HANSA FLEX

## 属性

| | |
|---|---|
| **工作压力** | Max. 16 bar |
| **工作温度** | -20 °C to +150 °C |
| **原料** | 黄铜镀镍 |
| **紧压环** | Nickel-plated brass |
| **O 形圈** | FKM (FPM) |
| **张紧环** | Stainless steel |



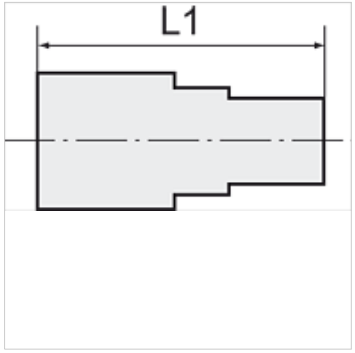


## 提示

其它数据应客户要求提供。

## 描述

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.<br>All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

## 货品

| 名称 | 螺纹 | 用于软管外径-Ø | L1 (mm) | SW |
|---|---|---|---|---|
| **K- 07 40 27 31** | M 5 | 4 mm | 20,5 | Ø 9 mm |
| **K- 07 40 27 32** | M 5 | 6 mm | 22,5 | Ø 10,5 mm |
| **K- 07 40 27 38** | G 1/8 | 4 mm | 20,0 | 9 mm |
| **K- 07 40 27 39** | G 1/8 | 6 mm | 24,0 | 11 mm |
| **K- 07 40 27 40** | G 1/8 | 8 mm | 26,5 | 13 mm |
| **K- 07 40 27 35** | G 1/4 | 4 mm | 21,0 | 9 mm |
| **K- 07 40 47 67** | G 1/8 | 10 mm | 29,0 | 16 mm |
| **K- 07 40 27 36** | G 1/4 | 6 mm | 24,0 | 11 mm |
| **K- 07 40 27 37** | G 1/4 | 8 mm | 25,0 | 13 mm |
| **K- 07 40 27 34** | G 1/4 | 10 mm | 29,0 | 16 mm |
| **K- 07 40 47 66** | G 1/4 | 12 mm | 31,5 | 18 mm |
| **K- 07 40 27 42** | G 3/8 | 8 mm | 25,0 | 13 mm |
| **K- 07 40 27 41** | G 3/8 | 10 mm | 29,5 | 16 mm |
| **K- 07 40 47 68** | G 3/8 | 12 mm | 31,0 | 18 mm |
| **K- 07 40 47 69** | G 3/8 | 14 mm | 34,0 | 21 mm |
| **K- 07 40 27 33** | G 1/2 | 10 mm | 31,0 | 16 mm |
| **K- 07 40 47 64** | G 1/2 | 12 mm | 31,5 | 18 mm |
| **K- 07 40 47 65** | G 1/2 | 14 mm | 34,5 | 21 mm |

*尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。*