# K-STECKVERSCH AGR-K SK BESCH 1

Male connectors, conical male thread, coated with outer hex

HANSA FLEX

## 属性

| | |
|---|---|
| **工作压力** | Max. 15 bar, coarse vacuum |
| **应用范围** | Air, vacuum |
| **推荐的软管** | PU or PA (nylon) |
| **适用介质** | Compressed air and all gases or liquids that are compatible with the materials |
| **温度范围** | -20 °C to +80 °C |
| **密封面** | Conical version: thread coating |
| **原料** | Plastic, Nickel plated brass |
| **紧压环** | Plastic |



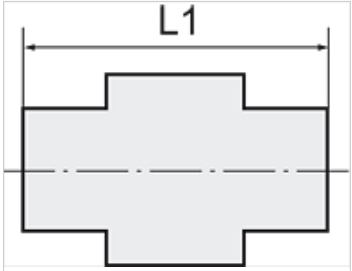


## 提示

其它数据应客户要求提供。

## 描述

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## 货品

| 名称 | 螺纹 | 用于软管外径-Ø | 内六角 (mm) | L1 (mm) | SW |
|---|---|---|---|---|---|
| **K- 07 40 01 12** | R 1/8 | 4 mm | 3,0 | 19,8 | 10 mm |
| **K- 07 40 01 13** | R 1/8 | 6 mm | 4,0 | 20,7 | 12 mm |
| **K- 07 40 01 14** | R 1/8 | 8 mm | 5,0 | 27,1 | 14 mm |
| **K- 07 40 01 10** | R 1/8 | 10 mm | 5,0 | 29,6 | 17 mm |
| **K- 07 40 01 11** | R 1/8 | 12 mm | 5,0 | 31,6 | 21 mm |
| **K- 07 40 01 07** | R 1/4 | 4 mm | 3,0 | 17,9 | 14 mm |
| **K- 07 40 01 08** | R 1/4 | 6 mm | 4,0 | 22,5 | 14 mm |
| **K- 07 40 01 09** | R 1/4 | 8 mm | 5,0 | 24,6 | 14 mm |
| **K- 07 40 01 05** | R 1/4 | 10 mm | 6,0 | 30,9 | 17 mm |
| **K- 07 40 01 06** | R 1/4 | 12 mm | 6,0 | 33,6 | 21 mm |
| **K- 07 40 01 18** | R 3/8 | 6 mm | 4,0 | 20,1 | 17 mm |
| **K- 07 40 01 19** | R 3/8 | 8 mm | 6,0 | 24,6 | 17 mm |
| **K- 07 40 01 15** | R 3/8 | 10 mm | 8,0 | 26,9 | 17 mm |
| **K- 07 40 01 16** | R 3/8 | 12 mm | 8,0 | 29,6 | 21 mm |
| **K- 07 40 01 17** | R 3/8 | 16 mm | 8,0 | 38,1 | 24 mm |
| **K- 07 40 01 03** | R 1/2 | 6 mm | 4,0 | 24,1 | 21 mm |
| **K- 07 40 01 04** | R 1/2 | 8 mm | 6,0 | 25,6 | 21 mm |
| **K- 07 40 01 00** | R 1/2 | 10 mm | 8,0 | 25,3 | 21 mm |
| **K- 07 40 01 01** | R 1/2 | 12 mm | 8,0 | 32,6 | 21 mm |
| **K- 07 40 01 02** | R 1/2 | 16 mm | 10,0 | 35,1 | 24 mm |

*尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。*