
K-STECKVERBINDU 2

Straight push-in connector

属性

工作压力	Max. 16 bar
工作温度	-20 °C to +150 °C
原料	黄铜镀镍
紧压环	Nickel-plated brass
张紧环	Stainless steel



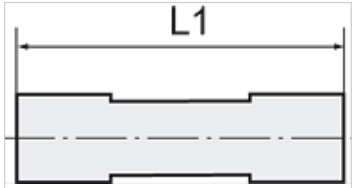

提示

其它数据应客户要求提供。

描述

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

货品

名称	用于软管外径-Ø	L1 (mm)
K- 07 40 27 49	4 mm	31,0
K- 07 40 27 50	6 mm	33,0
K- 07 40 27 51	8 mm	37,0
K- 07 40 27 52	10 mm	39,0
K- 07 40 47 74	12 mm	43,0
K- 07 40 40 91	14 mm	47,5

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。