


# K-L-STECKVER SK DREH AG OR

Male elbows with outer hex, swivel type, parallel male thread with O-ring

**HANSA FLEX**

## 属性

工作压力	Max. 15 bar, coarse vacuum
应用范围	Air, vacuum
推荐的软管	PU or PA (nylon)
适用介质	Compressed air and all gases or liquids that are compatible with the materials
温度范围	-20 °C to +80 °C
密封面	Parallel version: O-ring in housing
原料	Plastic, Nickel plated brass
紧压环	Plastic

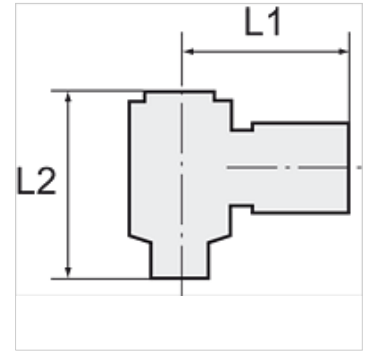

## 提示

其它数据应客户要求提供。

## 描述

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## 货品

名称	螺纹	用于软管外径-Ø	L1 (mm)	L2 (mm)	SW
K- 07 40 04 03	M 5	4 mm	20,0	17,2	8 mm
K- 07 40 04 04	M 5	6 mm	21,7	17,2	8 mm
K- 07 40 04 15	G 1/8	4 mm	22,3	23,5	10 mm
K- 07 40 04 16	G 1/8	6 mm	22,9	23,5	10 mm
K- 07 40 04 17	G 1/8	8 mm	25,3	23,5	10 mm
K- 07 40 04 14	G 1/8	10 mm	30,2	23,5	10 mm
K- 07 40 04 11	G 1/4	4 mm	24,0	26,0	14 mm
K- 07 40 04 12	G 1/4	6 mm	24,9	26,0	14 mm
K- 07 40 04 13	G 1/4	8 mm	28,4	26,0	14 mm
K- 07 40 04 09	G 1/4	10 mm	32,0	26,0	14 mm
K- 07 40 04 10	G 1/4	12 mm	32,0	26,0	14 mm
K- 07 40 04 20	G 3/8	6 mm	26,6	31,7	19 mm
K- 07 40 04 21	G 3/8	8 mm	29,3	31,7	19 mm
K- 07 40 04 18	G 3/8	10 mm	32,5	31,7	19 mm
K- 07 40 04 19	G 3/8	12 mm	35,3	31,7	19 mm
K- 07 40 04 07	G 1/2	6 mm	29,6	36,6	24 mm
K- 07 40 04 08	G 1/2	8 mm	32,3	36,6	24 mm
K- 07 40 04 05	G 1/2	10 mm	35,5	36,6	24 mm
K- 07 40 04 06	G 1/2	12 mm	36,3	36,6	24 mm