


K-T-STECK VB RED S M

Union tees, one unequal connector each on the side and in the centre

HANSA FLEX

属性

| | |
|-------|--|
| 工作压力 | Max. 15 bar, coarse vacuum |
| 应用范围 | Air, vacuum |
| 推荐的软管 | PU or PA (nylon) |
| 适用介质 | Compressed air and all gases or liquids that are compatible with the materials |
| 温度范围 | -20 °C to +80 °C |
| 原料 | Plastic, Nickel plated brass |
| 紧压环 | Plastic |
| 接口类型 | |

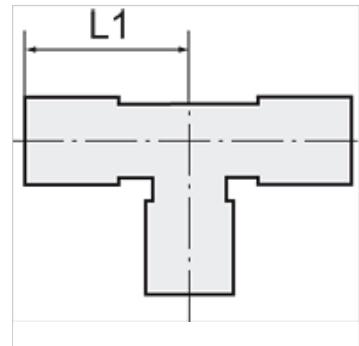

提示

其它数据应客户要求提供。

描述

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

货品

| 名称 | 用于软管外径-Ø | L1 (mm) |
|----------------|--------------------|------------|
| K- 07 40 46 49 | 4 mm / 4 mm / 6 mm | 19,0 |