
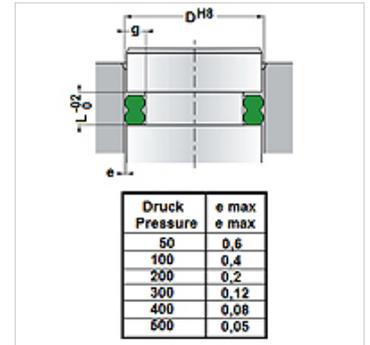


### 属性

|      |   |
|------|---|
| 结构类型 | 密封圈   |
| 工作压力 | 达 500 巴   |
| 温度范围 | PU18: -30 °C bis +100 °C<br>PU33: -40 °C bis + 120 °C |



### 描述

符合 ISO 标准的 O 型环槽可采用较大的尺寸范围。如果横截面为 3.53 mm,槽深根据 ISO 在 2.7 - 3.1 mm 之间。该密封环为了达到在所有尺寸范围内的最佳密封效果而制成,用于替换常规的 O 型环。

可与 O 型圈替换,

高流出阻力.

无需抗挤出环。

### 货品

| 名称             | D (mm)        | g (mm)        | L (mm) | cross section (mm) | 原料   |
|----------------|---------------|---------------|--------|--------------------|------|
| XS 40 - AK 353 | 40 to 41.9 mm | 2.7 to 3.1 mm |        | 3,53               | PU33 |
| XS 42 - AK 353 | 42 to 43.9 mm | 2.7 to 3.1 mm |        | 3,53               | PU18 |
| XS 44 - AK 353 | 44 to 45.9 mm | 2.7 to 3.1 mm |        | 3,53               | PU33 |
| XS 46 - AK 353 | 46 to 47.9 mm | 2.7 to 3.1 mm |        | 3,53               | PU18 |
| XS 48 - AK 353 | 48 to 49.9 mm | 2.7 to 3.1 mm |        | 3,53               | PU18 |
| XS 50 - AK 353 | 50 to 51.9 mm | 2.7 to 3.1 mm |        | 3,53               | PU33 |
| XS 52 - AK 353 | 52 to 53.9 mm | 2.7 to 3.1 mm |        | 3,53               | PU18 |
| XS 54 - AK 353 | 54 to 55.9 mm | 2.7 to 3.1 mm |        | 3,53               | PU33 |
| XS 56 - AK 353 | 56 to 57.9 mm | 2.7 to 3.1 mm |        | 3,53               | PU18 |
| XS 58 - AK 353 | 58 to 59.9 mm | 2.7 to 3.1 mm |        | 3,53               | PU18 |
| XS 60 - AK 353 | 60 to 62.9 mm | 2.7 to 3.1 mm |        | 3,53               | PU33 |
| XS 63 - AK 353 | 63 to 65.9 mm | 2.7 to 3.1 mm |        | 3,53               | PU33 |
| XS 66 - AK 353 | 66 to 69.9 mm | 2.7 to 3.1 mm |        | 3,53               | PU18 |
| XS 70 - AK 353 | 70 to 72.9 mm | 2.7 to 3.1 mm |        | 3,53               | PU33 |
| XS 73 - AK 353 | 73 to 75.9 mm | 2.7 to 3.1 mm |        | 3,53               | PU33 |
| XS 76 - AK 353 | 76 to 79.9 mm | 2.7 to 3.1 mm |        | 3,53               | PU18 |
| XS 80 - AK 353 | 80 to 84 mm   | 2.7 to 3.1 mm |        | 3,53               | PU33 |