


K-3WSV ELKT HANSA PRO

3/2-way poppet valve, electrically actuated, for HANSA PRO

HANSA FLEX

属性

| | |
|------------|--|
| 介质温度 | -10 °C to +50 °C |
| 环境温度 | -10 °C to +50 °C |
| 适用介质 | 压缩空气 |
| 保护等级 | IP 65 acc. to DIN 40050 |
| 固定形式 | Line mounting, mounting kit or wall mounting |
| 操纵件 | electrical |
| 压力范围 | 2 - 10 bar |
| 装入位置 | Any |
| 额定流量 G 1/2 | 5.200 l/min (P1 = 6 bar/Delta P = 1 bar) |
| 额定流量 G 3/8 | 4.300 l/min (P1 = 6 bar/Delta P = 1 bar) |
| PE 最大 11 | 10 bar |
| 壳体 | PA66 |

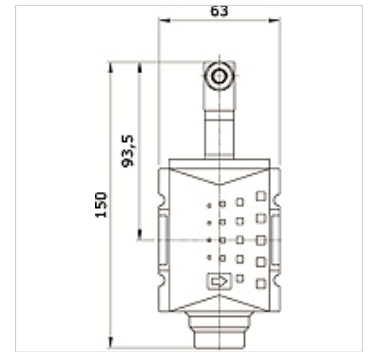

货品

| 名称 | 接口 | 额定电压/电流种类 | 结构尺寸 |
|----------------|---------|----------------|------|
| K- 07 25 22 48 | G 3/8 i | 24 V DC | 2 |
| K- 07 25 22 49 | G 3/8 i | 115 V AC 50 Hz | 2 |
| K- 07 25 22 50 | G 3/8 i | 230 V AC 50 Hz | 2 |
| K- 07 25 22 51 | G 1/2 i | 24 V DC | 2 |
| K- 07 25 22 52 | G 1/2 i | 115 V AC 50 Hz | 2 |
| K- 07 25 22 53 | G 1/2 i | 230 V AC 50 Hz | 2 |