

# K-G STECK 20-63 IG INFI

Straight push-in connector Ø 20 mm – Ø 63 mm with internal thread

**HANSA FLEX**

## 属性

适用介质 Compressed air, vacuum, inert gases

工作压力 -0,99 bar - 15 bar

温度范围 -20 °C to +80 °C

密封 NBR


壳体 Nickel-plated brass

夹紧环 Stainless steel 1.4301

螺母 Nickel-plated brass

O 形圈 NBR

防护垫圈 Technopolymer

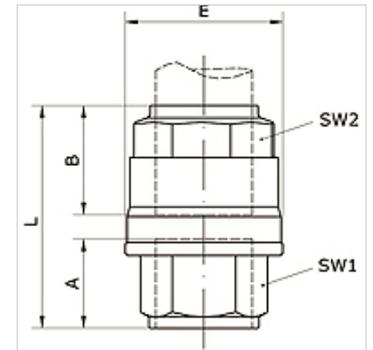

## 货品

| 名称             | 管外径 Ø | 接口      | A<br>(mm) | B<br>(mm) | E<br>(mm) | L<br>(mm) | SW1<br>(mm) | SW2<br>(mm) |
|----------------|-------|---------|-----------|-----------|-----------|-----------|-------------|-------------|
| K- 07 40 53 44 | 20 mm | G 1/2"  | 15,0      | 31,5      | 34,5      | 49,0      | 24          | 30          |
| K- 07 40 53 45 | 25 mm | G 3/4   | 16,5      | 38,5      | 42,5      | 56,5      | 32          | 35          |
| K- 07 40 53 46 | 32 mm | G 1     | 19,0      | 46,0      | 52,0      | 66,5      | 38          | 45          |
| K- 07 40 53 47 | 40 mm | G 1 1/4 | 22,0      | 52,0      | 63,0      | 76,0      | 50          | 55          |
| K- 07 40 53 48 | 50 mm | G 1 1/2 | 22,0      | 63,5      | 73,0      | 85,5      | 55          | 65          |