


K-WTEH 3-TLG PC-BEHÄLTER S W H G

Service units, 3-piece with polycarbonate bowl, bowl guard and joiner for wall mounting, semi-automatic drain valve

HANSA FLEX

属性

| | |
|-------------|--|
| 入口压力 | Max. 10 bar |
| 介质温度 | max. 70 °C |
| 环境温度 | Max. 70 °C |
| 过滤单元中的气孔宽度 | 5 µm |
| 密封材料 | NBR |
| 弹簧罩 | POM |
| 壳体 | Die-cast aluminium |
| 泄水头 | Brass/POM |
| Drain valve | Semi- or fully-automatic |
| 流量值测量 | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| 更多注明信息 | User manual on request |

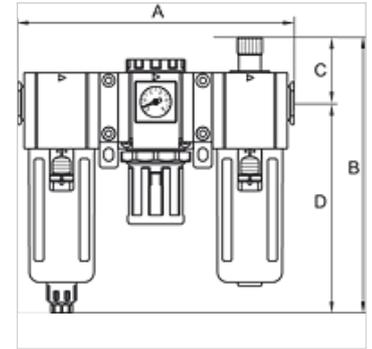

货品

| 名称 | 螺纹 | 调节范围 | 流量 (L/min) | A (mm) | B (mm) | C (mm) | D (mm) | 结构尺寸 |
|----------------|-------|-------------|------------|--------|----------|--------|--------|------|
| K- 07 25 14 21 | G 1/4 | 1.5 - 9 bar | 1100 | 179,0 | 187,0 mm | 44,0 | 143,0 | 300 |
| K- 07 25 14 23 | G 3/8 | 1.5 - 9 bar | 1400 | 179,0 | 187,0 mm | 44,0 | 143,0 | 300 |
| K- 07 25 14 25 | G 1/2 | 1.5 - 9 bar | 1400 | 179,0 | 187,0 mm | 44,0 | 143,0 | 300 |
| K- 07 25 14 27 | G 3/8 | 1.5 - 9 bar | 2950 | 236,0 | 214,5 mm | 48,0 | 166,5 | 400 |
| K- 07 25 14 29 | G 1/2 | 1.5 - 9 bar | 2950 | 236,0 | 214,5 mm | 48,0 | 166,5 | 400 |

附件

| | |
|------------------------------------|---|
| K-VERSCHLEI-SATZ | Set of wearing parts |
| K-ERSATZMEMBRANE | Replacement diaphragm |
| K-ADAPTERPLATTEN HANSA | Adapter plate HANSA |
| K-SCHUTZKORB G | Protective cage |
| K-FILTERELEMENT | Filter element |
| K-ERSATZBEHÄLTER G UND G-MINI POLY | Spare tanks »G« Series and »G-mini« Series Polycarbonat |
| K-VERBINDUNGSELEMENTE | Connecting sets |
| K-WANDHALTER | Wall bracket |