


K-TL-STECK VERS DRE MINI PAR

Male branch tee, swivel type, mini, parallel thread

HANSA FLEX

属性

工作压力	Max. 10 bar, vacuum
应用范围	Air, vacuum
推荐的软管	PU or PA (nylon)
适用介质	压缩空气
标准	M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring R thread acc. to ISO 7-1, thread coating
温度范围	0 °C to +60 °C
密封面	O-ring (NBR)
原料	Plastic, Nickel plated brass
紧压环	Plastic

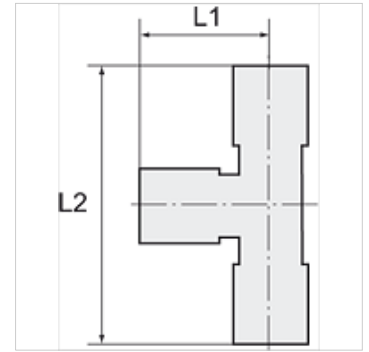

提示

其它数据应客户要求提供。

描述

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

货品

名称	螺纹	用于软管外径-Ø	L1 (mm)	L2 (mm)	SW
K- 07 40 23 28	M 3	3 mm	12,0	28,0	8 mm
K- 07 40 23 29	M 3	4 mm	14,0	31,2	8 mm
K- 07 40 23 30	M 5	3 mm	12,0	28,0	8 mm
K- 07 40 23 31	M 5	4 mm	14,0	31,2	8 mm
K- 07 40 23 32	M 5	6 mm	14,5	32,7	8 mm
K- 07 40 23 33	M 6	3 mm	12,0	28,5	10 mm
K- 07 40 23 34	M 6	4 mm	14,0	31,6	10 mm
K- 07 40 23 35	M 6	6 mm	14,5	33,1	10 mm
K- 07 40 23 36	G 1/8	4 mm	14,0	30,5	13 mm
K- 07 40 23 37	G 1/8	6 mm	16,0	32,5	13 mm
K- 07 40 23 38	R 1/8	4 mm	14,0	32,0	10 mm
K- 07 40 23 39	R 1/8	6 mm	14,5	33,5	10 mm