


## 属性

结构类型	安全阀
工作压力	最大350巴
附加特性	带TÜV许可证
原料	密封:NBR
接口	用于蓄压器 M33x2

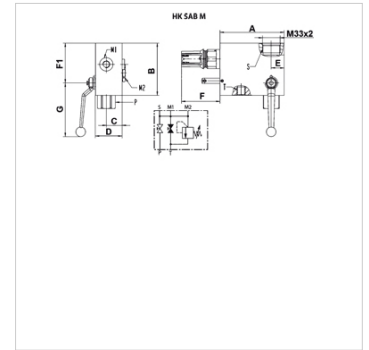

## 提示

安全阀已固定调节好,在将其分配给相应的蓄能器时请注意最大压力!

## 描述

The Safety Unit serves as a device for the protection, shut off and discharge of hydro accumulators. It is designed according to PED 2014/68/EU, article 3 paragraph 3, manufactured and considered to the European safety regulations for the operation of hydraulic accumulators. The discharge of the accumulator is manually by a ball valve or a relief valve.

液体的粘度必须在以下范围内:

最小10 mm<sup>2</sup>/s, 最大380 mm<sup>2</sup>/s

## 货品

名称	p max. (bar)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	F1 (mm)	G (mm)	M1	M2	P	T	重量 (kg)
HK SAB 10 M 100 N	100	120	98	29	50	24	73	75	101	1/4"	1/4"	1/2"	1/2"	4,2
HK SAB 10 M 200 N	200	120	98	29	50	24	73	75	101	1/4"	1/4"	1/2"	1/2"	4,2
HK SAB 10 M 210 N	210	120	98	29	50	24	73	75	101	1/4"	1/4"	1/2"	1/2"	4,2
HK SAB 10 M 250 N	250	120	98	29	50	24	73	75	101	1/4"	1/4"	1/2"	1/2"	4,2
HK SAB 10 M 330 N	330	120	98	29	50	24	73	75	101	1/4"	1/4"	1/2"	1/2"	4,2
HK SAB 20 M 330 N	330	98	120	39	71	25	73	90	184	1/2"	1/4"	1"	3/4"	6,6

## 附件

HK AS	安全和锁止块的蓄能器适配器
HK MSM	用于C型膜片式蓄能器的防松螺母

## 是下述产品的附件

HK OLM A	膜片式蓄能器 接口 A
HK OLM C	膜片式蓄能器 接口 C
HK BLAK	气囊式蓄能器