
HK PBA
斜轴轴向活塞泵

HANSA-FLEX

属性

规格	定量泵 氟胶密封件 漏油接口 G 3/8"
螺纹 压力侧	G 3/4" 至 63 VFU ccm G 1" 自 80 VFU ccm 起
螺纹 抽吸侧	G 3/4" 至 63 VFU ccm G 1" 自 80 VFU ccm 起
供货范围	含抽吸接套和检查软管



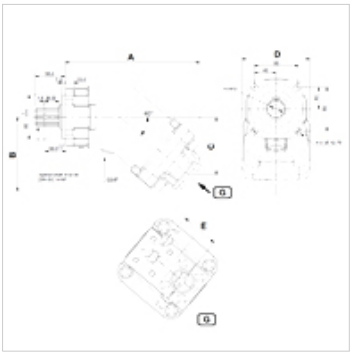

描述

Fixed displacement pump – hole pattern 80 x 80 – dia. 80 – shaft 8x32x16 ISO 14 – threaded fitting
Suction socket Ø 51.8 mm for HK PBA *** 51SF,
Suction socket Ø 64.5 mm for HK PBA *** 64SF
Changing rotational direction can be done by changing the setting screw and suction socket. Details can be found in the accompanying instructions.

货品

名称	VFU (cc)	p2 max. (bar)	p3 max. (bar)	转速 min. (rpm)	转速 max. (rpm)	A (mm)	B (mm)	C (mm)	D (mm)	转向	E (mm)	重量 (kg)
HK PBA 005 L 80 51 SF	5	350	400	500	3300	195	104	76	108	左转	54	8,7
HK PBA 012 L 80 51 SF	12	350	400	500	3100	195	104	76	108	左转	54	9,4
HK PBA 018 L 80 51 SF	18	350	400	500	2900	195	104	76	108	左转	54	9,4
HK PBA 025 L 80 51 SF	25	350	400	500	2700	195	104	76	108	左转	54	10,0
HK PBA 032 L 80 51 SF	32	350	400	500	2700	202	108	82	108	左转	54	11,0
HK PBA 040 L 80 51 SF	40	350	400	500	2500	202	108	82	108	左转	54	11,0
HK PBA 050 L 80 51 SF	50	350	400	500	2500	215	118	94	108	左转	54	11,5
HK PBA 056 L 80 51 SF	56	350	400	500	2300	215	118	94	108	左转	54	12,0
HK PBA 063 L 80 51 SF	63	350	400	500	2300	215	118	94	108	左转	54	12,0
HK PBA 080 L 80 51 SF	80	350	400	500	2100	242	132	104	122	左转	60	15,5
HK PBA 080 L 80 64 SF	80	350	400	500	2100	242	132	104	122	左转	60	15,5
HK PBA 108 L 80 51 SF	108	350	400	500	1900	242	132	105	122	左转	60	16,0
HK PBA 108 L 80 64 SF	108	350	400	500	1900	242	132	105	122	左转	60	16,0
HK PBA 130 LR 80 51 SF	130	350	400	500	1750	242	132	105	122	可换向	60	17,0
HK PBA 130 LR 80 64 SF	130	350	400	500	1750	242	132	105	122	可换向	60	17,0

p2 = 工作压力 – p3 = 最高压力

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。