


属性

| | |
|--------|--|
| 规格 | 定量泵 氟胶密封件 漏油接口 G 3/8" |
| 螺纹 压力侧 | G 3/4" 至 63 VFU ccm G 1" 自 80 VFU ccm 起 |
| 螺纹 抽吸侧 | G 3/4" 至 63 VFU ccm G 1" 自 80 VFU ccm 起 |
| 供货范围 | 含抽吸接套和检查软管 |

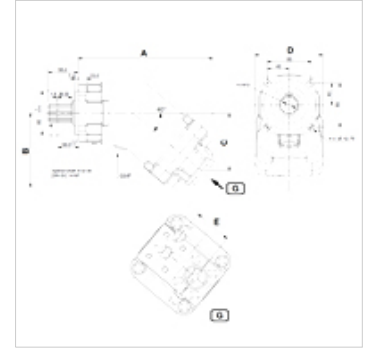

描述

Fixed displacement pump – hole pattern 80 x 80 – dia. 80 – shaft 8x32x16 ISO 14 – threaded fitting

Suction socket Ø 51.8 mm for HK PBA *** 51SF,

Suction socket Ø 64.5 mm for HK PBA *** 64SF

Changing rotational direction can be done by changing the setting screw and suction socket. Details can be found in the accompanying instructions.

货品

| 名称 | VFU (cc) | p2 max. (bar) | p3 max. (bar) | 转速 min. (rpm) | 转速 max. (rpm) | A (mm) | B (mm) | C (mm) | D (mm) | 转向 | E (mm) | 重量 (kg) |
|------------------------|-------------|------------------|------------------|------------------|------------------|-----------|-----------|-----------|-----------|-----|-----------|------------|
| HK PBA 005 L 80 51 SF | 5 | 350 | 400 | 500 | 3300 | 195 | 104 | 76 | 108 | 左转 | 54 | 8,7 |
| HK PBA 012 L 80 51 SF | 12 | 350 | 400 | 500 | 3100 | 195 | 104 | 76 | 108 | 左转 | 54 | 9,4 |
| HK PBA 018 L 80 51 SF | 18 | 350 | 400 | 500 | 2900 | 195 | 104 | 76 | 108 | 左转 | 54 | 9,4 |
| HK PBA 025 L 80 51 SF | 25 | 350 | 400 | 500 | 2700 | 195 | 104 | 76 | 108 | 左转 | 54 | 10,0 |
| HK PBA 032 L 80 51 SF | 32 | 350 | 400 | 500 | 2700 | 202 | 108 | 82 | 108 | 左转 | 54 | 11,0 |
| HK PBA 040 L 80 51 SF | 40 | 350 | 400 | 500 | 2500 | 202 | 108 | 82 | 108 | 左转 | 54 | 11,0 |
| HK PBA 050 L 80 51 SF | 50 | 350 | 400 | 500 | 2500 | 215 | 118 | 94 | 108 | 左转 | 54 | 11,5 |
| HK PBA 056 L 80 51 SF | 56 | 350 | 400 | 500 | 2300 | 215 | 118 | 94 | 108 | 左转 | 54 | 12,0 |
| HK PBA 063 L 80 51 SF | 63 | 350 | 400 | 500 | 2300 | 215 | 118 | 94 | 108 | 左转 | 54 | 12,0 |
| HK PBA 080 L 80 51 SF | 80 | 350 | 400 | 500 | 2100 | 242 | 132 | 104 | 122 | 左转 | 60 | 15,5 |
| HK PBA 080 L 80 64 SF | 80 | 350 | 400 | 500 | 2100 | 242 | 132 | 104 | 122 | 左转 | 60 | 15,5 |
| HK PBA 108 L 80 51 SF | 108 | 350 | 400 | 500 | 1900 | 242 | 132 | 105 | 122 | 左转 | 60 | 16,0 |
| HK PBA 108 L 80 64 SF | 108 | 350 | 400 | 500 | 1900 | 242 | 132 | 105 | 122 | 左转 | 60 | 16,0 |
| HK PBA 130 LR 80 51 SF | 130 | 350 | 400 | 500 | 1750 | 242 | 132 | 105 | 122 | 可换向 | 60 | 17,0 |
| HK PBA 130 LR 80 64 SF | 130 | 350 | 400 | 500 | 1750 | 242 | 132 | 105 | 122 | 可换向 | 60 | 17,0 |

p2 = 工作压力 – p3 = 最高压力