

K-KOMPAKTEJEKTOREN CP SYST

Compact ejectors »CP«, system monitoring function: digital vacuum switch

HANSA FLEX


属性

属性 Vacuum generator with integrated control valves and system monitoring functions
Gripping and blowing off can be controlled without the need for external valves
Optimised air consumption thanks to many models with differing suction capacities
Minimum energy costs in continuous operation thanks to automatic air-saving
Easy adjustment with foil keypad and LED display of the settings

应用 Handling of air-tight or slightly porous workpieces in fully automated handling systems
e.g. in the robotics, automotive, packaging, electronics, electrical engineering and metalworking industries

基体 Anodised aluminium

集成式 NC blow-off valve, filter, silencer, non-return valve

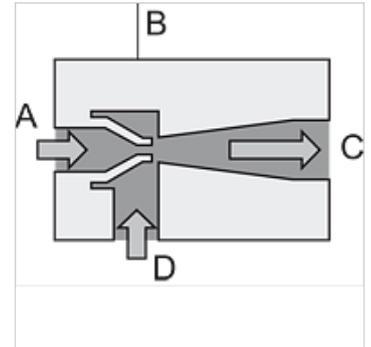

提示

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy. 其它数据应客户要求提供。

描述

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

附加信息

Important: Order two connection plugs per ejector. A cable set is included with the compact ejector with automatic air-saving.

货品

名称	喷嘴尺寸	抽吸阀静止位置	压缩空气接口	真空接头	抽吸空气消耗 (L/min)	最大抽吸能力 (L/min)	尺寸	工作压力 (bar)
K- 07 45 01 35	1,5	NC	G 1/8 IG	G1/8 female	117,0	65,0	72mm x 20mm x 164mm	5,0
K- 07 45 01 36	1,5	NO	G 1/8 IG	G1/8 female	117,0	65,0	72mm x 20mm x 164mm	5,0
K- 07 45 01 39	2,0	NC	G 1/4 IG	G 3/8 female	190,0	116,0	113mm x 22mm x 168mm	6,0
K- 07 45 01 40	2,0	NO	G 1/4 IG	G 3/8 female	190,0	116,0	113mm x 22mm x 168mm	6,0
K- 07 45 01 43	2,5	NC	G 1/4 IG	G 3/8 female	310,0	161,0	113mm x 22mm x 183mm	6,0
K- 07 45 01 44	2,5	NO	G 1/4 IG	G 3/8 female	310,0	161,0	113mm x 22mm x 183mm	6,0

附件

K-ANSCH KABEL VAKUUMSCHAL	Connection cable for vacuum switch
K-ERSATZSCHALLDAEMPFER 2	Replacement silencers
K-ERSATZFILTERELEMENTE	Replacement filter element