


K-WTEH 3-TLG PC SCH MANO HANSA

Service units, 3-piece with polycarbonate bowl, bowl guard and pressure gauge

HANSA FLEX

Свойства

| | |
|--------------------------------------|---|
| входящо налягане | 1.5 - 16 bar |
| изходящо налягане | 0.5 - 8 bar |
| Температурен диапазон | -10 °C to +50 °C |
| Течности | въздух под налягане |
| тънкоост на филтрация | 5,00 µm |
| присъединителна резба | Material: Die-cast zinc |
| резервоар | Polycarbonate (with bayonet lock) |
| филтриращ елемент | Cellpor (PE) |
| корпус | Material: Grivory® (PA 66) |
| мембрана | NBR |
| защитен кош | Polyamide |
| наставка прокапване | PA |
| разход на собствен въздух | Max. 1.5 l/min (depending on secondary pressure) |
| измерване на стойността на протичане | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |

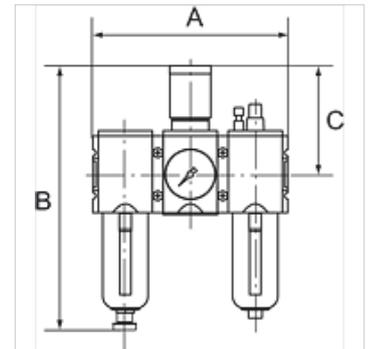

Указание

Други данни при запитване.

Описание

Two or three-piece service units with excellent flow rates in modern design. Lockable diaphragm pressure regulator with secondary ventilation, oil can be filled without interrupting operation.

Указания за поръчка

The price does not include a key lock. Please order separately.

Артикул

| Обозначение | Резба | протичане (L/min) | A (mm) | B | C (mm) | изпускане на кондензат |
|----------------|-------|-------------------|--------|----------|--------|------------------------|
| K- 07 25 14 37 | G 1/4 | 1500 | 156,0 | 225,0 mm | 95,5 | Semi |
| K- 07 25 14 38 | G 3/8 | 1500 | 156,0 | 225,0 mm | 95,5 | Semi |
| K- 07 25 14 39 | G 3/8 | 3500 | 189,0 | 257,0 mm | 110,0 | Semi |
| K- 07 25 14 40 | G 1/2 | 3500 | 189,0 | 257,0 mm | 110,0 | Semi |
| K- 07 25 14 41 | G 3/4 | 12000 | 255,0 | 329,0 mm | 137,0 | Semi |
| K- 07 25 14 42 | G 1 | 12000 | 255,0 | 329,0 mm | 137,0 | Semi |
| K- 07 25 14 43 | G 1/4 | 1500 | 156,0 | 243,0 mm | 95,5 | Auto |
| K- 07 25 14 44 | G 3/8 | 1500 | 156,0 | 243,0 mm | 95,5 | Auto |
| K- 07 25 14 45 | G 3/8 | 3500 | 189,0 | 274,0 mm | 110,0 | Auto |
| K- 07 25 14 46 | G 1/2 | 3500 | 189,0 | 274,0 mm | 110,0 | Auto |
| K- 07 25 14 47 | G 3/4 | 12000 | 255,0 | 343,0 mm | 137,0 | Auto |
| K- 07 25 14 48 | G 1 | 12000 | 255,0 | 343,0 mm | 137,0 | Auto |

Принадлежности

K-STECKSCHLOSS Key lock

Резервни части

| | |
|------------------------------|-------------------------------|
| K-HALTERBAUSATZ HANSA | Holder HANSA |
| K-ERSATZBEHAELTER HANSA POLY | Spare tank HANSA polycarbonat |
| K-FILTERELEMENT | Filter element |
| K-TROPFAUFSATZ HANSA | Drip attachment HANSA |
| K-SCHALTTAFELMUTTER HANSA | Nut HANSA |
| K-DICHTSATZ HANSA | Set of seals HANSA |