
# K-KOMPAKTEJEKTOREN CP SYST

Compact ejectors »CP«, system monitoring function: digital vacuum switch

## Vlastnosti

| | |
|---|---|
| **Vlastnosti** | Vacuum generator with integrated control valves and system monitoring functions<br>Gripping and blowing off can be controlled without the need for external valves<br>Optimised air consumption thanks to many models with differing suction capacities<br>Minimum energy costs in continuous operation thanks to automatic air-saving<br>Easy adjustment with foil keypad and LED display of the settings |
| **Použití** | Handling of air-tight or slightly porous workpieces in fully automated handling systems<br>e.g. in the robotics, automotive, packaging, electronics, electrical engineering and metalworking industries |
| **Základní tělo** | Anodised aluminium |
| **Integrovaný** | NC blow-off valve, filter, silencer, non-return valve |



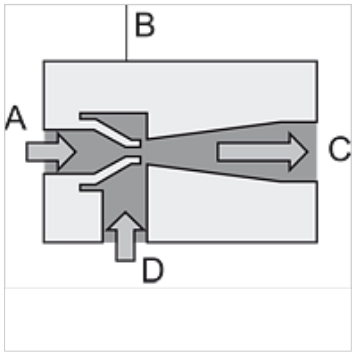


## Upozornění

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy. Další údaje na dotaz.

## Popis

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

## Další informace

Important: Order two connection plugs per ejector. A cable set is included with the compact ejector with automatic air-saving.

## Výrobek

| Označení | Velikost trysky | Klidová poloha sacího ventilu | Připojení stlačeného vzduchu | Podtlakový přípoj | Spotřeba vzduchu při sání (L/min) | Max. sací kapacita (L/min) | Rozměr | Provozní tlak (bar) |
|---|---|---|---|---|---|---|---|---|
| **K- 07 45 01 35** | 1,5 | NC | G 1/8 IG | G1/8 female | 117,0 | 65,0 | 72mm x 20mm x 164mm | 5,0 |
| **K- 07 45 01 36** | 1,5 | NO | G 1/8 IG | G1/8 female | 117,0 | 65,0 | 72mm x 20mm x 164mm | 5,0 |
| **K- 07 45 01 39** | 2,0 | NC | G 1/4 IG | G 3/8 female | 190,0 | 116,0 | 113mm x 22mm x 168mm | 6,0 |
| **K- 07 45 01 40** | 2,0 | NO | G 1/4 IG | G 3/8 female | 190,0 | 116,0 | 113mm x 22mm x 168mm | 6,0 |
| **K- 07 45 01 43** | 2,5 | NC | G 1/4 IG | G 3/8 female | 310,0 | 161,0 | 113mm x 22mm x 183mm | 6,0 |
| **K- 07 45 01 44** | 2,5 | NO | G 1/4 IG | G 3/8 female | 310,0 | 161,0 | 113mm x 22mm x 183mm | 6,0 |

## Příslušenství

| | |
|---|---|
| **K-ANSCH KABEL VAKUUMSCHAL** | Connection cable for vacuum switch |
| **K-ERSATZSCHALLDAEMPFER 2** | Replacement silencers |
| **K-ERSATZFILTERELEMENTE** | Replacement filter element |

*Navzdory nejpečlivější kontrole nemůžeme vyloučit chyby a nepřejímáme žádnou záruku za obsažené údaje.*