3 BKHL LK VZ / 3 BKHS LK VZ


3-way ball valve in block design

HANSA-FLEX

Properties

Connection 1 - 3	metric cylindrical outer thread
Sealing form 1 - 3	24° inner cone
Construction	Compact construction
Bore	L shaped
Contact travel	0°; 90°
Temp. min.	-10 °C
Temp. max.	80 °C
Material	Steel housing, ball and operating shaft POM ball seal NBR O-ring
Surface	electro galvanised



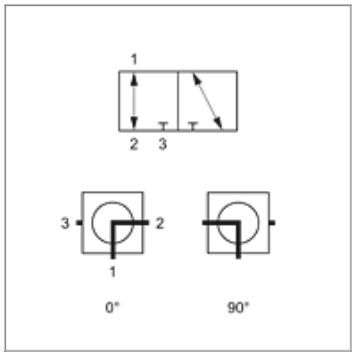

Note

Note the permissible pressure limits for the connecting elements.
Please refer to the operating instructions for ball valves.

Item

Identification	DN*	Series	for external pipe Ø (mm)	Connecting thread	Overlap	LW (mm)	Operating pressure	AF (mm)	SF*
3 BKHL 04 LK VZ	4	L	6	M 12x1,5	negative (open)	5,0	PN 400	9	1,5
3 BKHL 06 LK VZ	6	L	8	M 14x1,5	negative (open)	6,0	PN 400	9	1,5
3 BKHL 08 LK VZ	8	L	10	M 16x1,5	negative (open)	7,0	PN 400	9	1,5
3 BKHL 10 LK VZ	10	L	12	M 18x1,5	negative (open)	9,0	PN 400	9	1,5
3 BKHL 13 LK VZ	12	L	15	M 22x1,5	negative (open)	11,5	PN 350	9	1,5
3 BKHL 16 LK VZ	16	L	18	M 26x1,5	negative (open)	14,0	PN 350	12	1,5
3 BKHL 20 LK VZ	19	L	22	M 30x2	negative (open)	18,0	PN 350	14	1,5
3 BKHL 25 LK VZ	25	L	28	M 36x2	negative (open)	22,0	PN 350	14	1,5
3 BKHS 04 LK VZ	4	S	8	M 16x1,5	negative (open)	5,0	PN 400	9	1,5
3 BKHS 06 LK VZ	6	S	10	M 18x1,5	negative (open)	6,0	PN 400	9	1,5
3 BKHS 08 LK VZ	8	S	12	M 20x1,5	negative (open)	7,0	PN 400	9	1,5
3 BKHS 10 LK VZ	10	S	14	M 22x1,5	negative (open)	9,0	PN 400	9	1,5
3 BKHS 13 LK VZ	12	S	16	M 24x1,5	negative (open)	11,5	PN 350	9	1,5
3 BKHS 16 LK VZ	16	S	20	M 30x2	negative (open)	14,0	PN 350	12	1,5

DN = Nominal diameter, nominal width – Series: LL = Very light L = Light S = Heavy – LW = Clearance – PN = Nominal pressure PB = Max. operating pressure – AF = Width across flats – SF = Safety factor

Product versions

3 BKHL LK / 3 BKHS LK	3-way ball valve in block design, burnished

Spare parts

BK ANSCHLAG	Stop washers for ball valve
BK GEKR GRIFF SW	Handle (offset) for ball valve

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.