


Properties

| | |
|-----------------------|------------------------------------|
| Application | Connection fitting for metal hoses |
| Connection 1 | imperial outer thread, conical |
| Sealing form 1 | conical seat |
| Standard | DIN EN 10226 / ISO 7-1 |
| Construction | straight |
| Design | 3-part threaded connection |
| Material | Stainless steel |

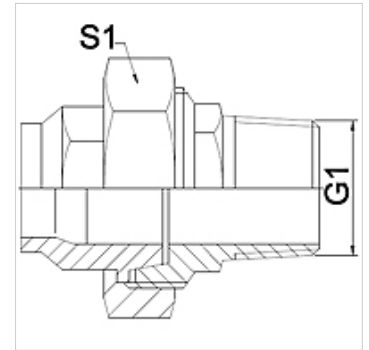

Note

Width across flats values are listed for reference purposes!

Ordering information

Other designs available on request

Item

| Identification | DN | PN (bar) | G1 | S1 (mm) |
|----------------|----|----------|----------|------------|
| WA 006 VC VA | 6 | 50 | R 1/4" | 27,0 |
| WA 010 VC VA | 10 | 50 | R 3/8" | 32,0 |
| WA 013 VC VA | 13 | 50 | R 1/2" | 41,0 |
| WA 020 VC VA | 20 | 50 | R 3/4" | 50,0 |
| WA 025 VC VA | 25 | 50 | R 1" | 55,0 |
| WA 032 VC VA | 32 | 40 | R 1.1/4" | 70,0 |
| WA 040 VC VA | 40 | 40 | R 1.1/2" | 75,0 |
| WA 050 VC VA | 50 | 40 | R 2" | 90,0 |
| WA 065 VC VA | 65 | 25 | R 2.1/2" | 110,0 |
| WA 080 VC VA | 80 | 25 | R 3" | 130,0 |

Product versions

| | |
|-----------------|--|
| WA VC | Connector ... VC, malleable cast iron, Malleable cast iron |
| WA VC RG | Connector ... VC, red bronze, Red bronze |