
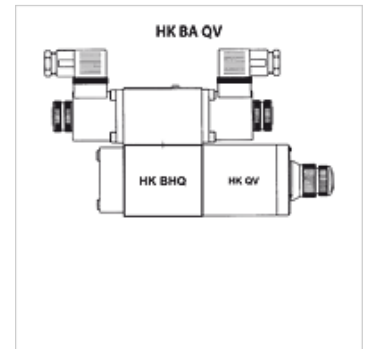


HK BHQ

Connection plate for flow control valve QV

Properties

| | |
|--------------------|---------------------|
| Scope of supply | incl. set of screws |
| Operating pressure | max. 250 bar |
| Connection | ISO/Cetop 03 size 6 |

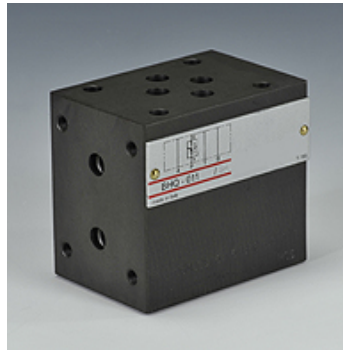

Description

The HK BHQ version permits the modular installation of HK QV 06 valves as sandwich plate with ISO/Cetop 03 hole pattern.

Item

| Identification | acts in channel | Design | Scope of supply | Weight (kg) |
|----------------|-----------------|--|------------------------------|-------------|
| HK BHQ 011 | P | without cover plate, drilled on one side | incl. screw set (4x M5 x 70) | 0,7 |
| HK BHQ 012 | A + B | without cover plate | incl. screw set (8x M5 x 70) | 0,7 |
| HK BHQ 013 | A | incl. cover plate | incl. screw set (4x M5 x 70) | 0,7 |
| HK BHQ 014 | B | incl. cover plate | incl. screw set (4x M5 x 70) | 0,7 |
| HK BHQ 016 | T | without cover plate, drilled on one side | incl. screw set (4x M5 x 70) | 0,7 |
| HK BHQ 022 | A + B | without cover plate | incl. screw set (8x M5 x 70) | 0,7 |
| HK BHQ 023 | A | incl. cover plate | incl. screw set (4x M5 x 70) | 0,7 |
| HK BHQ 024 | B | incl. cover plate | incl. screw set (4x M5 x 70) | 0,7 |

Accessory for following products

| | |
|-------|---|
| HK QV | Flow control valve for plate mounting Cetop |
|-------|---|