


# WA FL CU

Connector ... FL, copper

## Properties

<b>Application</b>	Connection fitting for metal hoses
<b>Connection 1</b>	Pipe sockets
<b>Sealing form 1</b>	Cutting ring connection
<b>Standard</b>	ISO 8434-1 DIN 3861
<b>Short code</b>	BEL
<b>Construction</b>	straight
<b>Series</b>	light
<b>Material</b>	Copper

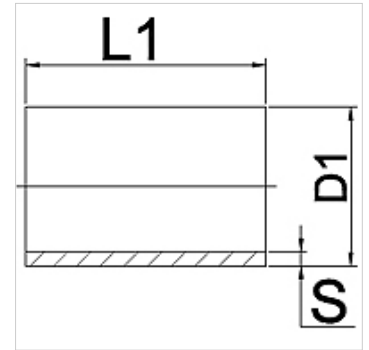

## Note

Final cutting ring assembly must be carried out in the hardened pre-assembly socket (VOM...).  
As an alternative we recommend connector shape AFL or AOL.

## Ordering information

Other designs available on request

## Item

Identification	DN	Series	D1 (mm)	s (mm)	L1 (mm)
WA 008 FL CU	8	10 L	10	1,0	30
WA 010 FL CU	10	12 L	12	1,0	30
WA 013 FL CU	13	15 L	15	1,5	32
WA 016 FL CU	16	18 L	18	1,5	32
WA 020 FL CU	20	22 L	22	1,5	36
WA 025 FL CU	25	28 L	28	2,0	40
WA 032 FL CU	32	35 L	35	2,0	45

## Product versions

WA FL	Connector ... FL, steel, Steel (weldable)
WA FL VA	Connector ... FL, VA, Stainless steel 1.4571