K-KOMPAKTEJEKTOREN MINI


Mini-compact ejectors

HANSA FLEX

Tulajdonságok

Tulajdonságok	Vacuum generator with integrated control valves and system monitoring functions Gripping and blowing off can be controlled without the need for external valves Optimised air consumption thanks to many models with differing suction capacities Minimum energy costs in continuous operation Easy adjustment with foil keypad, LED display of the settings Minimum size and low weight Optimum vacuum generation directly on the suction pad Complete solution for very simple installation Short learning curve thanks to "teach" function No need for additional sensors Easily visible status indication
Alkalmazás	Ideal where space is restricted and for highly dynamic movements, handling with industrial robots, linear axes pick-and-place systems
Kiürítési fok	85 %
Alaptest	Anodised aluminium
Integrálva	NC blow-off valve, filter, silencer, non-return valve



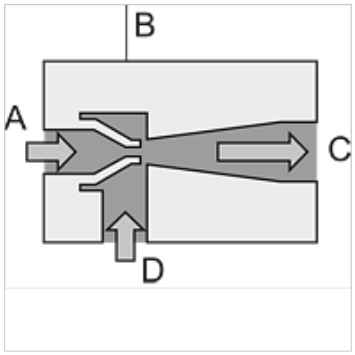

Megjegyzés

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy. További adatokért vegye fel a kapcsolatot.

Leírás

Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

További információk

Important: Order two connection plugs per ejector.

Cikk

Megnevezés	Fúvóka méret	Szívószelep nyugalmi állás	Sűrített levegő csatlakozó	Vákuum-csatlakozó	Levegő-felhasználás szívás (L/min)	max. szívási képesség (L/min)	Befoglaló méretek	Üzemi nyomás (bar)
K- 07 45 01 46	1,0	NC	M 5 IG	M5 female	46,0	23,0	65mm x 10mm x 107mm	4,5
K- 07 45 01 45	1,0	NO	M 5 IG	M5 female	46,0	23,0	65mm x 10mm x 107mm	4,5

Tartozék

K-ANSCHLUSSSTECK MAGNETVE 1	Connection plug for solenoid valves
K-ERSATZSCHALLDAEMPFER	Replacement silencers
K-ERSATZFILTERELEMENTE 1	Replacement filter element

Az alapos ellenőrzések ellenére nem tudunk minden hibát kizárni és ezért nem vállalunk felelősséget a megadott adatokért.