

# TRP HL

Zatisna armatura, CEL

**HANSA FLEX**

## Lastnosti

**Priključek 1** metrični zunanji navoj, cilindrični

**Oblika tesnila 1** 24° notranji konus


**kratica** CEL

**Standard** ISO 8434-1

**Obseg dobave** zatisna mazalka + okov

**Material:** jeklo

**Zaščita površine** galvanično prevlečeno

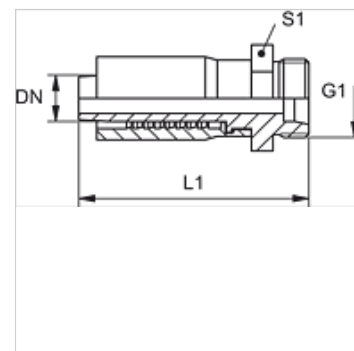

## Artikel

| Opis         | DN | Size | Palec | Seriya | G1         | za zunanji Ø cevi (mm) | L1 (mm) | S1 |
|--------------|----|------|-------|--------|------------|------------------------|---------|----|
| TRP 04 HL    | 5  | 3    | 3/16" | L      | M 12 x 1,5 | 6                      | 47,0    | 17 |
| TRP 06 HL    | 6  | 4    | 1/4"  | L      | M 14 x 1,5 | 8                      | 53,0    | 17 |
| TRP 08 HL    | 8  | 5    | 5/16" | L      | M 16 x 1,5 | 10                     | 57,0    | 19 |
| TRP 08 HL 10 | 8  | 5    | 5/16" | L      | M 18 x 1,5 | 12                     | 57,0    | 22 |
| TRP 10 HL    | 10 | 6    | 3/8"  | L      | M 18 x 1,5 | 12                     | 63,0    | 22 |
| TRP 10 HL 13 | 10 | 6    | 3/8"  | L      | M 22 x 1,5 | 15                     | 64,0    | 27 |
| TRP 13 HL    | 12 | 8    | 1/2"  | L      | M 22 x 1,5 | 15                     | 70,0    | 27 |