


# K-WTEH 3-TLG PC-BEHÄLTER S W H G

Service units, 3-piece with polycarbonate bowl, bowl guard and joiner for wall mounting, semi-automatic drain valve

**HANSA FLEX**

## Lastnosti

|                                  |  |
|----------------------------------|--|
| vstopni tlak                     | Max. 10 bar  |
| temperatura medija               | max. 70 °C   |
| temperatura okolice              | Max. 70 °C   |
| velikost por v filtrnem elementu | 5 µm   |
| tesnilni material                | NBR  |
| vzmetni pokrov                   | POM  |
| ohišje                           | Die-cast aluminium   |
| kapalni nastavek                 | Brass/POM  |
| Drain valve                      | Semi- or fully-automatic                                       |
| meritev pretoka                  | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| drugi podatki                    | User manual on request   |

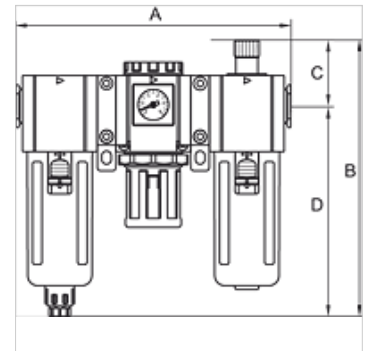

## Artikel

| Opis           | Navoj | regulacijsko območje | pretok (L/min) | A (mm) | B (mm)   | C (mm) | D (mm) | Velikost |
|----------------|-------|----------------------|----------------|--------|----------|--------|--------|----------|
| K- 07 25 14 21 | G 1/4 | 1.5 - 9 bar          | 1100           | 179,0  | 187,0 mm | 44,0   | 143,0  | 300      |
| K- 07 25 14 23 | G 3/8 | 1.5 - 9 bar          | 1400           | 179,0  | 187,0 mm | 44,0   | 143,0  | 300      |
| K- 07 25 14 25 | G 1/2 | 1.5 - 9 bar          | 1400           | 179,0  | 187,0 mm | 44,0   | 143,0  | 300      |
| K- 07 25 14 27 | G 3/8 | 1.5 - 9 bar          | 2950           | 236,0  | 214,5 mm | 48,0   | 166,5  | 400      |
| K- 07 25 14 29 | G 1/2 | 1.5 - 9 bar          | 2950           | 236,0  | 214,5 mm | 48,0   | 166,5  | 400      |

## Pribor

|                                    |   |
|------------------------------------|---|
| K-VERSCHLEI-SATZ                   | Set of wearing parts                                    |
| K-ERSATZMEMBRANE                   | Replacement diaphragm                                   |
| K-ADAPTERPLATTEN HANSA             | Adapter plate HANSA                                     |
| K-SCHUTZKORB G                     | Protective cage   |
| K-FILTERELEMENT                    | Filter element  |
| K-ERSATZBEHÄLTER G UND G-MINI POLY | Spare tanks »G« Series and »G-mini« Series Polycarbonat |
| K-VERBINDUNGSELEMENTE              | Connecting sets   |
| K-WANDHALTER                       | Wall bracket  |