


K-DRG DRVS MULTIFIX

Pressure regulators with pressure supply at both ends

HANSA FLEX

Osobine

| | |
|---------------------------|--|
| Ulazni pritisak | Max. 16 bar |
| Temperatura medija | max. 60 °C |
| Temperatura okoline | Max. 60 °C |
| Zaptivni materijal | NBR |
| Poklopac opruge | POM-brass |
| Kućište | Die-cast zinc |
| Merenje vrednosti protoka | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

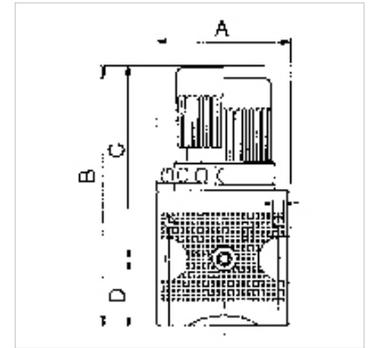

Napomena

Ostali podaci na upit.

Opis

Diaphragm pressure regulators with self-relieving design for mounting side by side. The pressure setting can be locked by pushing the knob down.

By assembling two or more controllers together, it is possible to supply several working air circuits with different output pressures via a single supply line.

Napomene u vezi porudžbine

The port for the output pressure (P2) is on the rear! K-07250031: G 1/4, K-07250034: G 1/2. Lockable pressure regulators K-07250030 available on request.

Artikal

| Naziv | Navoj | Opseg regulacije | Protok (L/min) | A (mm) | B | C (mm) | D (mm) | DN | Konstrukciona veličina |
|----------------|-------|------------------|----------------|--------|----------|--------|--------|----|------------------------|
| K- 07 25 00 31 | G 1/4 | 0.1 - 3 bar | 2000 | 47,8 | 94,8 mm | 67,0 | 27,8 | 6 | 1 |
| K- 07 25 00 32 | G 1/4 | 0.2 - 6 bar | 2000 | 47,8 | 94,8 mm | 67,0 | 27,8 | 6 | 1 |
| K- 07 25 00 30 | G 1/4 | 0.5 - 10 bar | 2000 | 47,8 | 94,8 mm | 67,0 | 27,8 | 6 | 1 |
| K- 07 25 00 34 | G 1/2 | 0.1 - 3 bar | 5500 | 68,8 | 134,1 mm | 99,0 | 35,1 | 15 | 2 |
| K- 07 25 00 35 | G 1/2 | 0.2 - 6 bar | 5500 | 68,8 | 134,1 mm | 99,0 | 35,1 | 15 | 2 |
| K- 07 25 00 33 | G 1/2 | 0.5 - 10 bar | 5500 | 68,8 | 134,1 mm | 99,0 | 35,1 | 15 | 2 |

Rezervni delovi

| | |
|--------------------------|----------------------|
| K-HALTERBAUSATZ | Holder |
| K-SCHALTAFELMÜTTER | Nut |
| K-HALTERBAUSATZ MULTIFIX | Holder |
| K-KOPPELPAKET MEHR | Coupling packet |
| K-KOPPELPAKET SCHMA | Coupling packet |
| K-VERSCHLEI-SATZ | Set of wearing parts |