


# T HMO HJ

## 旋入式接套,T形

### 属性

|            |             |
|------------|-------------|
| 接口 1       | 米制外螺纹,圆柱形   |
| 密封形式 1     | F型          |
| 接口 2 + 3   | UN/UNF外螺纹   |
| 密封形式 2 + 3 | 74°外锥       |
| 结构类型       | 方向可调节的旋入式接套 |
| 结构形式       | T形          |
| 原料         | 钢           |
| 表面保护       | 电镀涂层        |

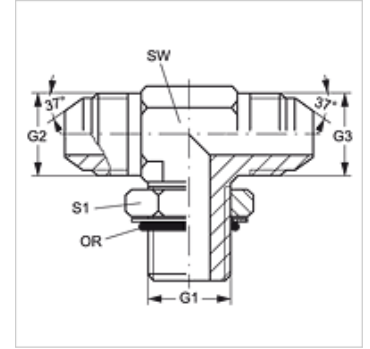

### 货品

| 名称             | G1         | G2 - G3        | SW<br>(mm) | S1 | OR         |
|----------------|------------|----------------|------------|----|------------|
| T HMO 10 HJ 04 | M 10 x 1   | 7/16" -20 UNF  | 11         | 14 | 8.2 x 1.5  |
| T HMO 10 HJ 05 | M 10 x 1   | 1/2" -20 UNF   | 13         | 14 | 8.2 x 1.5  |
| T HMO 12 HJ 04 | M 12 x 1.5 | 7/16" -20 UNF  | 13         | 17 | 9.4 x 2.1  |
| T HMO 12 HJ 05 | M 12 x 1.5 | 1/2" -20 UNF   | 13         | 17 | 9.4 x 2.1  |
| T HMO 14 HJ 05 | M 14 x 1.5 | 1/2" -20 UNF   | 14         | 17 | 11.3 x 2.4 |
| T HMO 14 HJ 06 | M 14 x 1.5 | 9/16" -18 UNF  | 14         | 19 | 11.3 x 2.4 |
| T HMO 16 HJ 06 | M 16 x 1.5 | 9/16" -18 UNF  | 19         | 22 | 13.4 x 2.1 |
| T HMO 16 HJ 08 | M 16 x 1.5 | 3/4" -16 UNF   | 19         | 22 | 13.4 x 2.1 |
| T HMO 18 HJ 06 | M 18 x 1.5 | 9/16" -18 UNF  | 22         | 19 | 15.4 x 2.1 |
| T HMO 18 HJ 08 | M 18 x 1.5 | 3/4" -16 UNF   | 19         | 24 | 15.4 x 2.1 |
| T HMO 18 HJ 10 | M 18 x 1.5 | 7/8" -14 UNF   | 22         | 24 | 15.4 x 2.1 |
| T HMO 22 HJ 10 | M 22 x 1.5 | 7/8" -14 UNF   | 22         | 27 | 19.4 x 2.1 |
| T HMO 22 HJ 12 | M 22 x 1.5 | 1.1/16" -12 UN | 27         | 27 | 19.4 x 2.1 |
| T HMO 27 HJ 12 | M 27 x 2   | 1.1/16" -12 UN | 27         | 32 | 23.7 x 2.8 |
| T HMO 27 HJ 16 | M 27 x 2   | 1.5/16" -12 UN | 33         | 32 | 23.7 x 2.8 |
| T HMO 33 HJ 16 | M 33 x 2   | 1.5/16" -12 UN | 33         | 41 | 29.7 x 2.8 |
| T HMO 42 HJ 20 | M 42 x 2   | 1.5/8" -12 UN  | 41         | 50 | 38.7 x 2.8 |
| T HMO 48 HJ 24 | M 48 x 2   | 1.7/8" -12 UN  | 48         | 55 | 46.7 x 2.8 |

SW, S1, S2 = 对应边宽度