


# SRS 1-6 SPW

Winkel-Anschweiß- und Anschraubplatte

**HANSA FLEX**

## Eigenschaften

<b>Bauform</b>	Winkel 90°
<b>Bauart</b>	für Einrohrschellen
<b>Baureihe</b>	leicht
<b>Norm</b>	DIN 3015-1
<b>Werkstoff</b>	Stahl
<b>Oberfläche</b>	phosphatiert

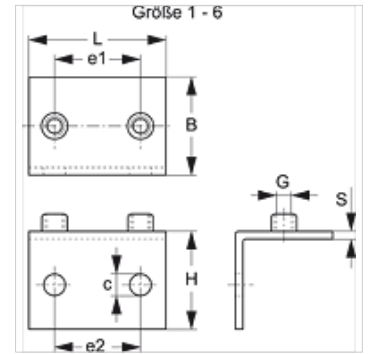

## Artikel

Bezeichnung	Schellengröße	B (mm)	c (mm)	e1 (mm)	e2 (mm)	G	H (mm)	L (mm)	S (mm)
<b>SRS SPW 1 A</b>	1	30	6,6	20,0	20	M 6	30	36,0	3
<b>SRS SPW 2</b>	2	30	6,6	26,0	26	M 6	30	42,0	3
<b>SRS SPW 3</b>	3	30	6,6	33,0	33	M 6	30	50,0	3
<b>SRS SPW 4</b>	4	30	6,6	40,0	40	M 6	30	59,0	3
<b>SRS SPW 5</b>	5	30	6,6	52,0	52	M 6	30	72,0	3
<b>SRS SPW 6</b>	6	30	6,6	66,0	66	M 6	30	88,0	3

## Produktvarianten

**SRS 1-6 SPW V4** Winkel-Anschweiß- und Anschraubplatte, Edelstahl 1.4571

## ist Zusatzelement zu folgenden Produkten

**A 1-6** Zusammenstellung der Gruppe A 1-6