


LOET HJOF

Soldered socket ORFS

Properties

| | |
|-----------------------|-----------------------|
| Connection 1 | Soldered connection |
| Connection 2 | ORFS external threads |
| Sealing form 2 | flat seal with O-ring |
| Design | Soldered socket |
| Construction | straight |
| Material | Steel |
| Surface | oiled |

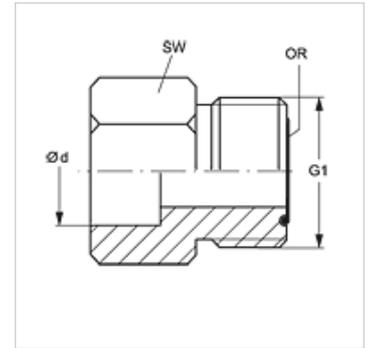

Item

| Identification | Ø d (mm) | G1 | AF (mm) | OR |
|-----------------|----------|-----------------|---------|--------------|
| LOET 04 HJOF 06 | 6 | 9/16"-18 UNF | 17 | 7.65 x 1.78 |
| LOET 04 HJOF 08 | 8 | 9/16"-18 UNF | 17 | 7.65 x 1.78 |
| LOET 04 HJOF 10 | 10 | 9/16"-18 UNF | 17 | 7.65 x 1.78 |
| LOET 06 HJOF 06 | 6 | 11/16"-16 UN | 19 | 9.25 x 1.78 |
| LOET 06 HJOF 10 | 10 | 11/16"-16 UN | 19 | 9.25 x 1.78 |
| LOET 06 HJOF 12 | 12 | 11/16"-16 UN | 19 | 9.25 x 1.78 |
| LOET 08 HJOF 12 | 12 | 13/16"-16 UN | 22 | 12.42 x 1.78 |
| LOET 08 HJOF 14 | 14 | 13/16"-16 UN | 22 | 12.42 x 1.78 |
| LOET 08 HJOF 16 | 16 | 13/16"-16 UN | 22 | 12.42 x 1.78 |
| LOET 10 HJOF 10 | 10 | 1" -14 UNS | 27 | 15.60 x 1.78 |
| LOET 10 HJOF 16 | 16 | 1" -14 UNS | 27 | 15.60 x 1.78 |
| LOET 10 HJOF 18 | 18 | 1" -14 UNS | 27 | 15.60 x 1.78 |
| LOET 12 HJOF 18 | 18 | 1.3/16" -12 UN | 32 | 18.77 x 1.78 |
| LOET 12 HJOF 20 | 20 | 1.3/16" -12 UN | 32 | 18.77 x 1.78 |
| LOET 12 HJOF 22 | 22 | 1.3/16" -12 UN | 32 | 18.77 x 1.78 |
| LOET 12 HJOF 25 | 25 | 1.3/16" -12 UN | 32 | 18.77 x 1.78 |
| LOET 16 HJOF 16 | 16 | 1.7/16" -12 UN | 41 | 23.52 x 1.78 |
| LOET 16 HJOF 25 | 25 | 1.7/16" -12 UN | 41 | 23.52 x 1.78 |
| LOET 16 HJOF 28 | 28 | 1.7/16" -12 UN | 41 | 23.52 x 1.78 |
| LOET 16 HJOF 32 | 32 | 1.7/16" -12 UN | 41 | 23.52 x 1.78 |
| LOET 20 HJOF 32 | 32 | 1.11/16" -12 UN | 46 | 29.87 x 1.78 |
| LOET 20 HJOF 35 | 35 | 1.11/16" -12 UN | 46 | 29.87 x 1.78 |
| LOET 20 HJOF 38 | 38 | 1.11/16" -12 UN | 46 | 29.87 x 1.78 |
| LOET 24 HJOF 38 | 38 | 2" -12 UN | 55 | 37.82 x 1.78 |
| LOET 32 HJOF 30 | 30 | 2.1/2" -12 UN | 75 | 48.90 x 2.62 |

Ø d = External pipe diameter