


# W45 AJF HJOF

Connector, angle 45°

**HANSA FLEX**

## Properties

<b>Connection 1</b>	ORFS nut threads
<b>Sealing form 1</b>	flat sealing
<b>Connection 2</b>	ORFS external threads
<b>Sealing form 2</b>	flat seal with O-ring
<b>Design</b>	Connectors
<b>Construction</b>	Angle 45°
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

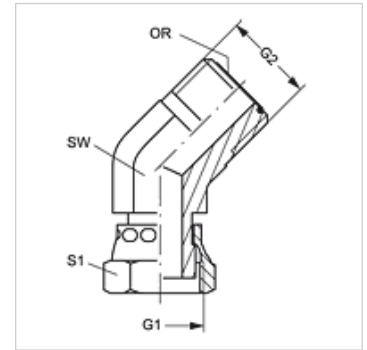

## Item

Identification	Operating pressure	G1 + G2	AF (mm)	S1	OR
W45 AJF 04 HJOF	PN 630	9/16"-18 UNF	14	17	7.65 x 1.78
W45 AJF 06 HJOF	PN 630	11/16" -16 UN	19	22	9.25 x 1.78
W45 AJF 08 HJOF	PN 630	13/16" -16 UN	19	24	12.42 x 1.78
W45 AJF 10 HJOF	PN 400	1" -14 UNS	27	30	15.60 x 1.78
W45 AJF 12 HJOF	PN 400	1.3/16" -12 UN	30	36	18.77 x 1.78
W45 AJF 16 HJOF	PN 400	1.7/16" -12 UN	36	41	23.52 x 1.78
W45 AJF 20 HJOF	PN 250	1.11/16" -12 UN	41	50	29.87 x 1.78
W45 AJF 24 HJOF	PN 250	2" -12 UN	48	60	37.82 x 1.78

SW, S1, S2 = With across flats