

# W90 HN HJOF VA

Screw-in socket, angle 90°

**HANSA FLEX**

## Properties

**Connection 1** NPT external threads

**Sealing form 1** thread seal


**Connection 2** ORFS external threads

**Sealing form 2** flat seal with O-ring

**Design** Screw-in sockets

**Construction** Angle 90°

**Material** Stainless steel

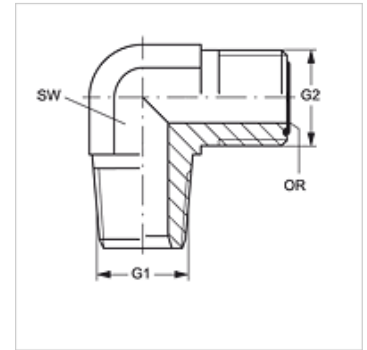

## Ordering information

Seals of NBR

FPM (Viton) on request

## Item

Identification	G1	G2	AF (mm)	OR
W90 HN 02 HJOF 04 VA	1/8" -27 NPT	9/16"-18 UNF	14	7.65 x 1.78
W90 HN 04 HJOF VA	1/4" -18 NPT	9/16"-18 UNF	14	7.65 x 1.78
W90 HN 04 HJOF 06 VA	1/4" -18 NPT	11/16" -16 UN	19	9.25 x 1.78
W90 HN 04 HJOF 08 VA	1/4" -18 NPT	13/16" -16 UN	22	12.42 x 1.78
W90 HN 06 HJOF VA	3/8" -18 NPT	11/16" -16 UN	19	9.25 x 1.78
W90 HN 06 HJOF 08 VA	3/8" -18 NPT	13/16" -16 UN	19	12.42 x 1.78
W90 HN 08 HJOF VA	1/2" -14 NPT	13/16" -16 UN	22	12.42 x 1.78
W90 HN 08 HJOF 10 VA	1/2" -14 NPT	1" -14 UNS	27	15.60 x 1.78
W90 HN 12 HJOF VA	3/4" -14 NPT	1.3/16" -12 UN	30	18.77 x 1.78
W90 HN 16 HJOF VA	1" -11.5 NPT	1.7/16" -12 UN	37	23.52 x 1.78

AF = Width across flats

## Product versions

W90 HN HJOF Screw-in socket, angle 90°, Steel