

# W90 HRO L HJ

Screw-in socket, long, angle 90°

## Properties

**Connection 1** BSP external thread, cylindrical

**Sealing form 1** form G

**Connection 2** UN/UNF external threads


**Sealing form 2** 74° outer cone

**Design** Screw-in socket, long

**Construction** Angle 90°

**Material** Steel

**Surface** electro galvanised

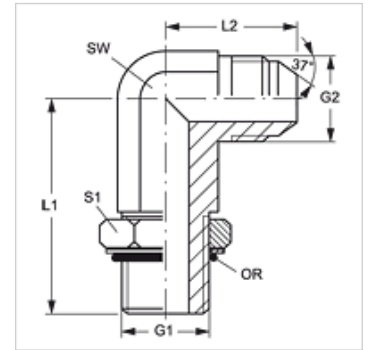

## Item

| Identification     | G1         | G2             | AF<br>(mm) | L1<br>(mm) | L2<br>(mm) | S1 | OR           |
|--------------------|------------|----------------|------------|------------|------------|----|--------------|
| W90 HRO L 04 HJ 06 | G 1/4" -19 | 9/16"-18 UNF   | 14         | 56,5       | 27,0       | 19 | 8.00 x 2.00  |
| W90 HRO L 04 HJ 08 | G 1/4" -19 | 3/4"-16 UNF    | 19         | 64,0       | 31,5       | 19 | 8.00 x 2.00  |
| W90 HRO L 06 HJ    | G 3/8" -19 | 9/16"-18 UNF   | 19         | 67,0       | 28,5       | 22 | 13.94 x 2.62 |
| W90 HRO L 06 HJ 08 | G 3/8" -19 | 3/4"-16 UNF    | 19         | 67,0       | 31,5       | 22 | 13.94 x 2.62 |
| W90 HRO L 06 HJ 10 | G 3/8" -19 | 7/8"-14 UNF    | 22         | 75,0       | 36,5       | 22 | 17.86 x 2.62 |
| W90 HRO L 08 HJ 06 | G 1/2" -14 | 9/16"-18 UNF   | 22         | 78,0       | 31,0       | 27 | 17.86 x 2.62 |
| W90 HRO L 08 HJ    | G 1/2" -14 | 3/4"-16 UNF    | 22         | 78,0       | 34,0       | 27 | 17.86 x 2.62 |
| W90 HRO L 08 HJ 10 | G 1/2" -14 | 7/8"-14 UNF    | 22         | 78,0       | 36,5       | 27 | 17.86 x 2.62 |
| W90 HRO L 08 HJ 12 | G 1/2" -14 | 1.1/16" -12 UN | 27         | 88,0       | 42,0       | 27 | 17.86 x 2.62 |
| W90 HRO L 12 HJ 10 | G 3/4" -14 | 7/8"-14 UNF    | 27         | 92,0       | 39,5       | 36 | 23.47 x 2.62 |
| W90 HRO L 12 HJ    | G 3/4" -14 | 1.1/16" -12 UN | 27         | 92,0       | 42,0       | 36 | 23.47 x 2.62 |
| W90 HRO L 12 HJ 16 | G 3/4" -14 | 1.5/16" -12 UN | 33         | 105,0      | 46,0       | 36 | 23.47 x 2.62 |
| W90 HRO L 16 HJ 12 | G 1" -11   | 1.1/16" -12 UN | 33         | 105,0      | 44,5       | 41 | 29.74 x 3.53 |
| W90 HRO L 16 HJ    | G 1" -11   | 1.5/16" -12 UN | 33         | 105,0      | 46,0       | 41 | 29.74 x 3.53 |
| W90 HRO L 16 HJ 20 | G 1" -11   | 1.5/8" -12 UN  | 41         | 124,0      | 52,0       | 41 | 29.74 x 3.53 |

SW, S1, S2 = With across flats