


# G AJ HJOF

## Connectors

### Properties

|                       |                       |
|-----------------------|-----------------------|
| <b>Connection 1</b>   | UN/UNF nut threads    |
| <b>Sealing form 1</b> | 74° inner cone        |
| <b>Connection 2</b>   | ORFS external threads |
| <b>Sealing form 2</b> | flat seal with O-ring |
| <b>Design</b>         | Connectors            |
| <b>Construction</b>   | straight              |
| <b>Material</b>       | Steel                 |
| <b>Surface</b>        | electro galvanised    |

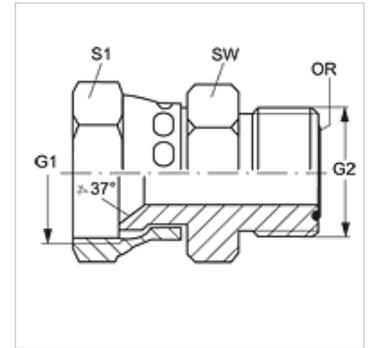

### Item

| Identification      | G1             | G2             | AF<br>(mm) | S1 | OR           |
|---------------------|----------------|----------------|------------|----|--------------|
| <b>G AJ 04 HJOF</b> | 7/16"-20 UNF   | 9/16"-18 UNF   | 16         | 14 | 7.65 x 1.78  |
| <b>G AJ 06 HJOF</b> | 9/16"-18 UNF   | 11/16" -16 UN  | 19         | 18 | 9.25 x 1.78  |
| <b>G AJ 08 HJOF</b> | 3/4"-16 UNF    | 13/16" -16 UN  | 22         | 22 | 12.42 x 1.78 |
| <b>G AJ 10 HJOF</b> | 7/8" -14 UNF   | 1" -14 UNS     | 27         | 25 | 15.60 x 1.78 |
| <b>G AJ 12 HJOF</b> | 1.1/16" -12 UN | 1.3/16" -12 UN | 32         | 32 | 18.77 x 1.78 |
| <b>G AJ 16 HJOF</b> | 1.5/16" -12 UN | 1.7/16" -12 UN | 38         | 38 | 23.52 x 1.78 |

SW, S1, S2 = With across flats