


# G AJF HJOF VA

## Connectors

### Properties

<b>Connection 1</b>	ORFS nut threads
<b>Sealing form 1</b>	flat sealing
<b>Connection 2</b>	ORFS external threads
<b>Sealing form 2</b>	flat seal with O-ring
<b>Design</b>	Connectors
<b>Construction</b>	straight
<b>Material</b>	Stainless steel

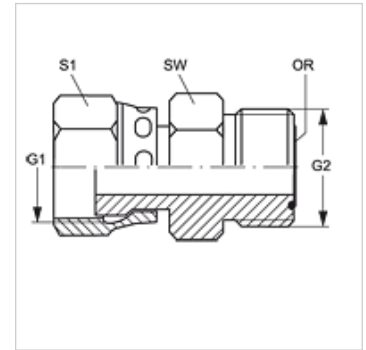

### Ordering information

Seals of NBR  
FPM (Viton) on request

Item	G1	G2	AF (mm)	S1	OR
<b>G AJF 04 HJOF 06 VA</b>	9/16"-18 UNF	11/16" -16 UN	19	18	9.25 x 1.78
<b>G AJF 06 HJOF 04 VA</b>	11/16" -16 UN	9/16"-18 UNF	-	21	7.65 x 1.78
<b>G AJF 08 HJOF 06 VA</b>	13/16" -16 UN	11/16" -16 UN	22	24	9.25 x 1.78
<b>G AJF 10 HJOF 08 VA</b>	1" -14 UNS	13/16" -16 UN	22	30	12.42 x 1.78
<b>G AJF 12 HJOF 06 VA</b>	1.3/16" -12 UN	11/16" -16 UN	19	36	9.25 x 1.78
<b>G AJF 12 HJOF 08 VA</b>	1.3/16" -12 UN	13/16" -16 UN	32	36	12.42 x 1.78
<b>G AJF 16 HJOF 08 VA</b>	1.7/16" -12 UN	13/16" -16 UN	22	41	12.42 x 1.78
<b>G AJF 16 HJOF 12 VA</b>	1.7/16" -12 UN	1.3/16" -12 UN	41	41	18.77 x 1.78
<b>G AJF 24 HJOF 16 VA</b>	2" -12 UN	1.7/16" -12 UN	38	60	23.52 x 1.78

SW, S1, S2 = With across flats

### Product versions

**G AJF HJOF** Connectors, Steel