

GE HMO AJF

Screw-in sockets

Properties

Connection 1 metric cylindrical outer thread

Sealing form 1 O-ring seal on screw-in socket

Connection 2 ORFS nut threads


Sealing form 2 Flat seal

Design Screw-in sockets

Construction straight

Material Steel

Surface electro galvanised

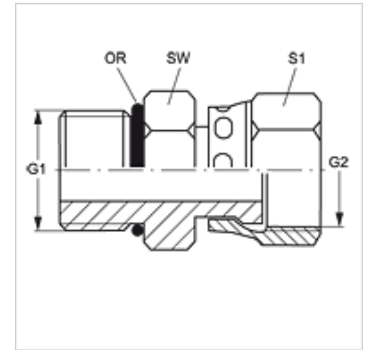

Item

| Identification | G1 | G2 | AF (mm) | S1 | OR |
|------------------|------------|-----------------|------------|----|------------|
| GE HMO 12 AJF 04 | M 12 x 1.5 | 9/16"-18 UNF | 17 | 17 | 9.4 x 2.1 |
| GE HMO 14 AJF 06 | M 14 x 1.5 | 11/16" -16 UN | 19 | 22 | 11.4 x 2.1 |
| GE HMO 16 AJF 06 | M 16 x 1.5 | 11/16" -16 UN | 22 | 22 | 13.4 x 2.1 |
| GE HMO 16 AJF 08 | M 16 x 1.5 | 13/16" -16 UN | 22 | 24 | 13.4 x 2.1 |
| GE HMO 22 AJF 10 | M 22 x 1.5 | 1" -14 UNS | 27 | 30 | 19.4 x 2.1 |
| GE HMO 27 AJF 10 | M 27 x 2 | 1" -14 UNS | 27 | 30 | 23.7 x 2.8 |
| GE HMO 27 AJF 12 | M 27 x 2 | 1.3/16" -12 UN | 32 | 36 | 23.7 x 2.8 |
| GE HMO 33 AJF 16 | M 33 x 2 | 1.7/16" -12 UN | 41 | 41 | 29.7 x 2.8 |
| GE HMO 42 AJF 20 | M 42 x 2 | 1.11/16" -12 UN | 50 | 50 | 38.7 x 2.8 |

SW, S1, S2 = With across flats