


# PA 500 AOS 45 VA

Swage fitting, DKOS angle 45°

**HANSA FLEX**

## Properties

<b>Application</b>	Swage fitting for HD 500 hoses
<b>Connection 1</b>	metric nut thread
<b>Sealing form 1</b>	24° outer cone with O-ring
<b>Short code</b>	DKOS
<b>Standard</b>	ISO 8434-1
<b>Integration</b>	with pull-out protection (interlock)
<b>Scope of supply</b>	Swage nipple + swage ferrule
<b>Material</b>	Stainless steel

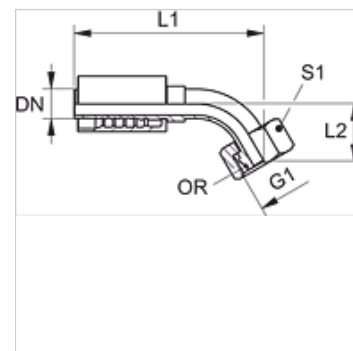

## Ordering information

Seals of NBR

FPM (Viton) on request

## Item

Identification	DN	Size	Inches	G1	for external pipe Ø (mm)	L2 (mm)	S1	OR
PA 520 AOS 16 45 VA	19	12	3/4"	M 30 x 2	20	45,0	36	17.5 x 2.5
PA 520 AOS 45 VA	19	12	3/4"	-	25	40,0	46	22.0 x 2.5
PA 525 AOS 20 45 VA	25	16	1"	-	25	52,0	46	22.0 x 2.5
PA 525 AOS 45 VA	25	16	1"	-	30	43,0	50	27.0 x 2.5
PA 532 AOS 45 VA	31	20	1.1/4"	-	38	52,0	60	33.0 x 2.5

## Product versions

PA 500 AOS 45 A Swage fitting, DKOS angle 45°, Steel