

# ND AJ

Plug-in nipple, DKJ

## Properties

**Connection 1** UN/UNF nut threads


**Sealing form 1** 74° inner cone

**Short code** DKJ

**Standard** ISO 8434-2

**Material** Steel

**Surface** electro galvanised

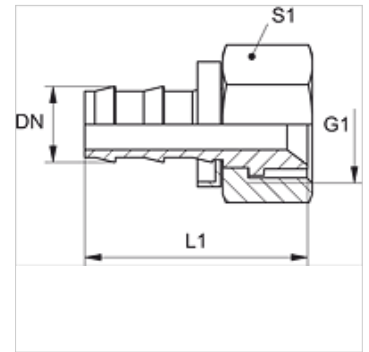

## Note

Undamaged nipples can be reused.

## Item

| Identification | DN | Size | Inches | G1             | L1 (mm) | S1 |
|----------------|----|------|--------|----------------|---------|----|
| ND 06 AJ       | 6  | 4    | 1/4"   | 7/16"-20 UNF   | 40,0    | 14 |
| ND 06 AJ 08    | 6  | 4    | 1/4"   | 1/2"-20 UNF    | 40,0    | 17 |
| ND 10 AJ       | 10 | 6    | 3/8"   | 9/16"-18 UNF   | 45,0    | 19 |
| ND 13 AJ       | 12 | 8    | 1/2"   | 3/4"-16 UNF    | 51,0    | 22 |
| ND 13 AJ 16    | 12 | 8    | 1/2"   | 7/8" -14 UNF   | 65,0    | 27 |
| ND 16 AJ       | 16 | 10   | 5/8"   | 7/8" -14 UNF   | 65,0    | 27 |
| ND 20 AJ       | 19 | 12   | 3/4"   | 1.1/16" -12 UN | 67,0    | 32 |
| ND 25 AJ       | 25 | 16   | 1"     | 1.5/16" -12 UN | 70,0    | 41 |

## Accessories

ND ASR GE, RO, BL Stop ring for plug-in nipple