PA 500 AOB 90 A


Swage fitting, DKOR angle 90°

HANSA-FLEX

Properties

Application	Swage fitting for HD 500 hoses
Connection 1	BSP nut thread
Sealing form 1	60° outer cone with O-ring
Short code	DKOR
Standard	ISO 8434-6 BS 5200
Integration	with pull-out protection (interlock)
Scope of supply	Swage nipple + swage ferrule
Material	Steel
Surface	electro galvanised



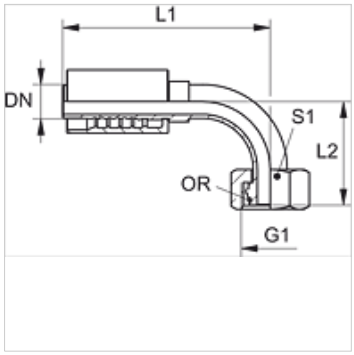

Item

Identification	DN	Size	Inches	G1	L1 (mm)	L2 (mm)	S1	OR
PA 720 AOB 90	19	12	3/4"	G 3/4" -14	127,5	68,2	32	17.1 x 1.6
PA 725 AOB 90	25	16	1"	G 1" -11	158,0	81,7	41	22.1 x 1.6
PA 532 AOB 90 A	31	20	1.1/4"	G 1.1/4" -11	182,0	106,5	50	29.1 x 1.6
PA 540 AOB 90 A	38	24	1.1/2"	G 1.1/2" -11	215,5	123,5	60	35.1 x 1.6
PA 550 AOB 90 A	51	32	2"	G 2" -11	250,5	146,0	70	48.1 x 1.6

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.