


PA 700 AOS

Swage fitting, DKOS

Properties

Application	Swage fitting for HD 700 hoses
Connection 1	metric nut thread
Sealing form 1	24° outer cone with O-ring
Short code	DKOS
Standard	ISO 8434-1
Integration	with pull-out protection (interlock)
Scope of supply	Swage nipple + swage ferrule
Material	Steel
Surface	electro galvanised

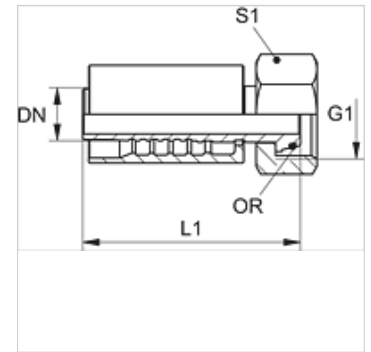

Item

Identification	DN	Size	Inches	Operating pressure (bar)	G1	for external pipe Ø (mm)	S1	L1 (mm)	OR
PA 710 AOS 08	10	6	3/8"	630,0	M 20 x 1.5	-	24	-	10.0 x 1.5
PA 710 AOS	10	6	3/8"	630,0	M 22 x 1.5	14	27	67,6	12.0 x 2.0
PA 713 AOS	12	8	1/2"	420,0	M 24 x 1.5	16	30	72,8	13.0 x 2.0
PA 713 AOS 16	12	8	1/2"	420,0	M 30 x 2	20	36	75,8	17.5 x 2.5
PA 716 AOS 13	16	10	5/8"	420,0	M 24 x 1.5	16	30	83,5	13.0 x 2.0
PA 716 AOS	16	10	5/8"	420,0	M 30 x 2	20	36	86,0	17.5 x 2.5
PA 716 AOS 20	16	10	5/8"	420,0	M 36 x 2	25	41	89,0	20.0 x 2.5
PA 720 AOS 16	19	12	3/4"	420,0	M 30 x 2	20	36	96,0	16.0 x 2.5
PA 720 AOS	19	12	3/4"	420,0	M 36 x 2	25	46	99,0	20.0 x 2.5
PA 720 AOS SW41	19	12	3/4"	420,0	M 36 x 2	25	41	99,0	20.0 x 2.5
PA 720 AOS 25	19	12	3/4"	420,0	M 42 x 2	30	50	100,0	25.0 x 2.5
PA 725 AOS 20	25	16	1"	420,0	M 36 x 2	25	46	112,0	20.0 x 2.5
PA 725 AOS	25	16	1"	420,0	M 42 x 2	30	50	113,0	25.0 x 2.5
PA 725 AOS 32	25	16	1"	420,0	M 52 x 2	38	60	131,0	33.0 x 2.5
PA 732 AOS 25 S	31	20	1.1/4"	420,0	M 42 x 2	30	50	151,0	27.0 x 2.5
PA 732 AOS S	31	20	1.1/4"	420,0	M 52 x 2	38	60	112,5	33.0 x 2.5
PA 740 AOS 32	38	24	1.1/2"	420,0	M 52 x 2	38	60	136,5	33.0 x 2.5

Product versions

PA 700 AOS VA Swage fitting, DKOS, Stainless steel