


PN AFL

Swage nipple, DKL

Properties

Application	Swage nipple for HD 100 to HD 400, KP and TE hoses
Connection 1	metric nut thread
Sealing form 1	24°/60° Universal sealing head
Short code	DKL
Series	light
Material	Steel
Surface	electro galvanised

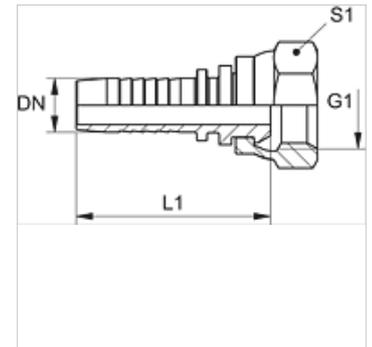

Note

Choose the appropriate ferrule based on the hose type.

Item	Identification	DN	Size	Inches	Operating pressure (bar)	G1	for external pipe Ø (mm)	L1 (mm)	S1
PN 04 AFL	PN 04 AFL	5	3	3/16"	250,0	M 12 x 1.5	6	41,2	14
PN 06 AFL 04	PN 06 AFL 04	6	4	1/4"	250,0	M 12 x 1.5	6	45,0	14
PN 06 AFL	PN 06 AFL	6	4	1/4"	250,0	M 14 x 1.5	8	47,0	17
PN 06 AFL 08	PN 06 AFL 08	6	4	1/4"	250,0	M 16 x 1.5	10	47,5	19
PN 06 AFL 10	PN 06 AFL 10	6	4	1/4"	250,0	M 18 x 1.5	12	48,5	22
PN 08 AFL	PN 08 AFL	8	5	5/16"	250,0	M 16 x 1.5	10	47,5	19
PN 08 AFL 10	PN 08 AFL 10	8	5	5/16"	250,0	M 18 x 1.5	12	48,5	22
PN 10 AFL 06	PN 10 AFL 06	10	6	3/8"	250,0	M 14 x 1.5	8	49,5	17
PN 10 AFL 08	PN 10 AFL 08	10	6	3/8"	250,0	M 16 x 1.5	10	49,0	19
PN 10 AFL	PN 10 AFL	10	6	3/8"	250,0	M 18 x 1.5	12	50,0	22
PN 10 AFL 13	PN 10 AFL 13	10	6	3/8"	250,0	M 22 x 1.5	15	50,5	27
PN 13 AFL	PN 13 AFL	12	8	1/2"	250,0	M 22 x 1.5	15	51,5	27
PN 13 AFL 16	PN 13 AFL 16	12	8	1/2"	160,0	M 26 x 1.5	18	54,0	32
PN 16 AFL 13	PN 16 AFL 13	16	10	5/8"	160,0	M 22 x 1.5	15	56,0	27
PN 16 AFL	PN 16 AFL	16	10	5/8"	160,0	M 26 x 1.5	18	58,5	32
PN 20 AFL	PN 20 AFL	19	12	3/4"	160,0	M 30 x 2	22	66,0	36
PN 20 AFL 25	PN 20 AFL 25	19	12	3/4"	100,0	M 36 x 2	28	67,0	41
PN 25 AFL	PN 25 AFL	25	16	1"	100,0	M 36 x 2	28	75,0	41
PN 32 AFL	PN 32 AFL	31	20	1.1/4"	100,0	M 45 x 2	35	88,0	50
PN 40 AFL	PN 40 AFL	38	24	1.1/2"	100,0	M 52 x 2	42	92,5	60

Product versions

PN AFL VA	Swage nipple, DKL, Stainless steel
-----------	------------------------------------