
PN AFL
Swage nipple, DKL

Properties

Application	Swage nipple for HD 100 to HD 400, KP and TE hoses
Connection 1	metric nut thread
Sealing form 1	24°/60° Universal sealing head
Short code	DKL
Series	light
Material	Steel
Surface	electro galvanised



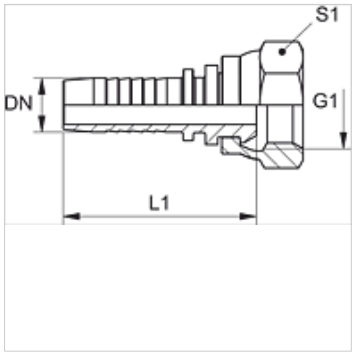

Note
Choose the appropriate ferrule based on the hose type.

Item

Identification	DN	Size	Inches	Operating pressure (bar)	G1	for external pipe Ø (mm)	L1 (mm)	S1
PN 04 AFL	5	3	3/16"	250,0	M 12 x 1.5	6	41,2	14
PN 06 AFL 04	6	4	1/4"	250,0	M 12 x 1.5	6	45,0	14
PN 06 AFL	6	4	1/4"	250,0	M 14 x 1.5	8	47,0	17
PN 06 AFL 08	6	4	1/4"	250,0	M 16 x 1.5	10	47,5	19
PN 06 AFL 10	6	4	1/4"	250,0	M 18 x 1.5	12	48,5	22
PN 08 AFL	8	5	5/16"	250,0	M 16 x 1.5	10	47,5	19
PN 08 AFL 10	8	5	5/16"	250,0	M 18 x 1.5	12	48,5	22
PN 10 AFL 06	10	6	3/8"	250,0	M 14 x 1.5	8	49,5	17
PN 10 AFL 08	10	6	3/8"	250,0	M 16 x 1.5	10	49,0	19
PN 10 AFL	10	6	3/8"	250,0	M 18 x 1.5	12	50,0	22
PN 10 AFL 13	10	6	3/8"	250,0	M 22 x 1.5	15	50,5	27
PN 13 AFL	12	8	1/2"	250,0	M 22 x 1.5	15	51,5	27
PN 13 AFL 16	12	8	1/2"	160,0	M 26 x 1.5	18	54,0	32
PN 16 AFL 13	16	10	5/8"	160,0	M 22 x 1.5	15	56,0	27
PN 16 AFL	16	10	5/8"	160,0	M 26 x 1.5	18	58,5	32
PN 20 AFL	19	12	3/4"	160,0	M 30 x 2	22	66,0	36
PN 20 AFL 25	19	12	3/4"	100,0	M 36 x 2	28	67,0	41
PN 25 AFL	25	16	1"	100,0	M 36 x 2	28	75,0	41
PN 32 AFL	31	20	1.1/4"	100,0	M 45 x 2	35	88,0	50
PN 40 AFL	38	24	1.1/2"	100,0	M 52 x 2	42	92,5	60

Product versions

PN AFL VA	Swage nipple, DKL, Stainless steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.