


PN AFLF 90 / PN AFSF 90

Swage nipple, DKFM angle 90°

HANSA FLEX

Properties

Application	Swage nipple for HD 100 to HD 400, KP and TE hoses
Connection 1	metric nut thread
Sealing form 1	24° outer cone for French series metric pipe.
Short code	DKFM
Series	French (metric pipe)
Material	Steel
Surface	electro galvanised

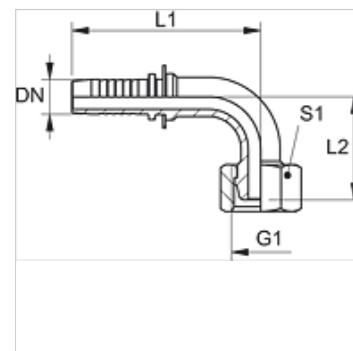

Note

Choose the appropriate ferrule based on the hose type.

Item										
Identification	DN	Size	Inches	Operating pressure (bar)	G1	Series	for external pipe Ø (mm)	L1 (mm)	L2 (mm)	S1
PN 16 AFLF 90	16	10	5/8"	250,0	M 27 x 1.5	L	18	91,0	57,0	32
PN 20 AFLF 90	19	12	3/4"	250,0	M 30 x 1.5	L	22	108,0	65,0	36
PN 25 AFLF 90	25	16	1"	160,0	M 36 x 1.5	L	28	125,0	73,0	46
PN 16 AFSF 90	16	10	5/8"	250,0	M 27 x 1.5	S	20	91,0	57,0	46
PN 20 AFSF 90	19	12	3/4"	250,0	M 33 x 1.5	S	25	109,0	66,0	41
PN 25 AFSF 90	25	16	1"	160,0	M 39 x 1.5	S	30	125,0	63,0	46